



总经理：张永军
GENERAL MANAGER: YONGJUN ZHANG

Company Introduction

Established in October,1994, Qingdao HongHua Tyre Factory locates itself in the famous touring city of Qingdao.With excellent manufacturing machines and a whole team of first-class professional technicians,HongHua has developed itself into a Top Five professional bias tyre factory in China. With over 600 staffs , and covering 160,000 square meters ,We have reached an annual output value of over \$80 million.

Our products range covers OTR Tyre, Industrial Tyre, Solid Tyre, Military Tyre, Mining Tyre, Agricultural Tyre, Speciality Tyre and Truck & Trailer Tyre etc..

Qingdao Honghua Tyre Factory managed to go through the ISO9001, ISO14001, ISO45001, CCC, DOT such certificates, and Smithers Test & Reach Test. We have the good reputations in market and bank. We are the SGS/BV Certificated factory in China also.

Benefiting from practicing district agency distribution mode, We have successfully established an entire sales network spreading all over the country. Now with ROCKBUSTER & ROADBUSTER brands, by continuous innovating and advancing,we are making Qingdao HongHua a worldwide famous factory in the tyre market.

After 27 years efforts, Qingdao HongHua Tyre is eager to provide quality good products and services for any domestic and international customers. We would like to sincerely appreciate any friends visiting here.WE QUALIFY YOUR WORK ALWAYS!



FACTORY ENVIRONMENT



MAIN PRODUCTS / 主要产品

- 1-12 ● **OTR TYRE**
工程机械轮胎
- 13-16 ● **FORKLIFT TYRE**
叉车轮胎
- 17-26 ● **SPECIALITY IND TYRE**
特种工业轮胎
- 27-34 ● **SUPER SOLID TYRE**
实心轮胎
- 35-48 ● **AGRICULTURAL TYRE**
农业轮胎
- 49-54 ● **MINING TYRE**
矿山轮胎
- 55-58 ● **INDIAN PATTERNS TYRE**
印度花纹轮胎
- 59-66 ● **TRUCK TYRE**
卡车轮胎

PRODUCT BRANDS / 产品商标

ROCKBUSTER[®]

ROADBUSTER[®] **HIMILE**[™]

 **钢铁轮胎**
STEEL TYRES  **欧美亚** **ECOTYRE**

CERTIFICATES / 企业认证



NOM **SGS** **REACH SVHC**  **SMITHERS RAPRA**



OTR TYRE

工程机械轮胎



<http://www.honghuatyre.com>

H108A

L-3/E-3 GENERAL BLOCK (S TREAD)
普通花纹块工程机械轮胎



Specially designed for cut and heat resistant compound.
Regular type of tread pattern suitable for hard rock surface and haulage service.

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg)		Pressure (kpa)		Type	Code
						50km/h	10km/h	50km/h	10km/h		
14.00-24	16	25	10.0	375	1370	4000	7300	375	550	TT/TL	H108A L-3 E-3
	20					4625	8500	475	700		
	24					5150	9500	575	850		
	28					5600	10000	650	925		
16.00-24	20	28	11.25/2.0	430	1495	5450	9750	400	550		
	24					6000	10600	475	650		
	28					6700	11500	575	750		
	32					7300	12500	650	875		
17.5-25	16	28	14.00/1.5	445	1350	4250	7300	300	475		
	20					5000	8250	400	575		
20.5-25	20	30	17.00/2.0	520	1490	6000	9500	325	450		
	24					6700	10300	400	525		
	28					7500	11500	475	625		
23.5-25	20	33	19.50/2.5	595	1615	7300	10900	300	375		
	24					8000	12500	350	475		
	28					8750	13600	400	550		
26.5-25	28	35	22.00/3.0	675	1750	10000	15500	350	475		
	32					11200	17000	425	550		
29.5-25	28	38	25.00/3.5	750	1875	11500	17500	325	425		
	34					12500	19000	375	500		
										TL	
Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg) @10km/h		Pressure (kpa) @10km/h		Type	Code
16/70-24	14	20	13(SDC)	410	1175	5600		450		TT	H108A L-3 E-3
16/70-20	14	30	13(SDC)	410	1150	5150		450			
	18					5800		550			
16/70-20	14	20	13(SDC)	410	1150	5150		450			
	18					5800		550			
16/70-20	14	22	13(SDC)	410	1050	5150		450			
	18					5800		550			
16/60-20	14	20	13(SDC)	410	1010	5150		450			
20.5/70-16	14	22	10.00G	335	910	1600		280			
16/70-16											
20.5/70-16**	14	17	10.00G	335	910	1600		280			
16/70-16**											
14/90-16	10	16	7.0N	270	882	1530		350			
12.00-16	12	17	6.50H	255	890	1600		420			
8.25-16	8	16	6.5	235	865	1530		300			
7.50-16	8	16	5.5	215	815	750		150			

H108AE

L-3/E-3 GENERAL BLOCK (ECOTYRE)
普通花纹块工程机械轮胎 (经济型)



Specially designed for wheel loader and earthmover working in good road condition.

It is economic type for users.

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg)		Pressure (kpa)		Type	Code
						50km/h	10km/h	50km/h	10km/h		
17.5-25	16	26.5	14.00/1.5	445	1350	4250	7300	300	475	TT/TL	H108AE L-3 E-3
	20					5000	8250	400	575		
20.5-25	20	28	17.00/2.0	520	1490	6000	9500	325	450		
	24					6700	10300	400	525		
23.5-25	20	30	19.50/2.5	595	1615	7300	10900	300	375		
	24					8000	12500	350	475		

H108B

L-3/E-3 LARGE BLOCK (S TREAD)
大块花纹工程机械轮胎



Optimized pattern design for mining and quarrying operations.
Excellent abrasion.

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg)		Pressure (kpa)		Type	Code
						50km/h	10km/h	50km/h	10km/h		
17.5-25	16	28	14.00/1.5	445	1350	4250	7300	300	475	TT/TL	H108B L-3 E-3
	20					5000	8250	400	575		
23.5-25	20	33	19.50/2.5	595	1615	7300	10900	300	375		
	24					8000	12500	350	475		
	28					8750	13600	400	550		



H108C NEW L-3/E-3 LOADER MASTER(Z TREAD) Z型块状工程机械轮胎 (龙工型)

New Z tread tyre for low intensity application of Loader/Earthmover/Grader.

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg)		Pressure (kpa)		Type	Code
						50km/h	10km/h	50km/h	10km/h		
16.00-25	28	28.5	11.25/2.0	430	1495	6700	11500	575	750	TT/TL	H108C L-3 E-3
	32					7300	12500	650	875		
	36					7750	13600	725	975		
	40					8200	14500	800	1075		
18.00-25	32	31.5	13.00/2.5	500	1615	8750	15000	575	750		
	36					9250	16000	625	850		
	40					9750	17000	700	950		
	44					10500	18000	775	1030		
15.5-25	12	24.5	12.00/1.3	395	1275	3250	5600	250	400		
	16					3850	6750	325	525		
17.5-25	16	28	14.00/1.5	445	1350	4250	7300	300	475		
	20					5000	8250	400	575		
20.5-25	20	30	17.00/2.0	520	1490	6000	9500	325	450		
	24					6700	10300	400	525		
	28					7500	11500	475	625		
23.5-25	20	33	19.50/2.5	595	1615	7300	10900	300	375		
	24					8000	12500	350	475		
	28					8750	13600	400	550		
26.5-25	28	35	22.00/3.0	675	1750	10000	15500	350	475		
	32					11200	17000	425	550		
29.5-25	28	38	25.00/3.5	750	1875	11500	17500	325	425		
	34					12500	19000	375	500		
20.5/70-16	14	22	10.00G	335	910		1600		280	TT	
16/70-16											
20.5/70-16	14	14	10.00G	335	910		1600		280		
16/70-16											
20.5/70-16	14	14	10.00G	335	830		1600		280		
16/70-16											



H108CE NEW L-3/E-3 LOADER TYRE Z TREAD (ECOTYRE) Z型龙工花纹工程机械轮胎 (经济型)

NEW Z tread tyre for wheel loader and earthmover working in good road condition.

It is economic type for users.

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg)		Pressure (kpa)		Type	Code
						50km/h	10km/h	50km/h	10km/h		
17.5-25	16	27	14.00/1.5	445	1350	4250	7300	300	475	TT/TL	H108CE L-3 E-3
	20					5000	8250	400	575		
20.5-25	20	28	17.00/2.0	520	1490	6000	9500	325	450		
	24					6700	10300	400	525		
23.5-25	20	30	19.50/2.5	595	1615	7300	10900	300	375		
	24					8000	12500	350	475		

H108D L-3/E-3 SNOW STAR SPECIAL (ANTI-SKIDDING) 冰雪类似路面专用工程机械轮胎 (防滑专用)

Suitable for snow & ice and similar road condition where need good anti-skidding ability.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg)		Pressure (kpa)		Type	Code
						50km/h	10km/h	50km/h	10km/h		
17.5-25	16	28	14.00/1.5	445	1350	4250	7300	300	475	TT/TL	H108D L-3 E-3
	20					5000	8250	400	575		

H108E

L-3/E-3 PREMIUM DESIGN OTR TYRE
高档设计工程机械轮胎

Block non-directional pattern design,
Excellent holding and traction performance
With good controllability.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg)		Pressure (kpa)		Type	Code
						50km/h	10km/h	50km/h	10km/h		
★ 17.5-25	16	30	14.00/1.5	445	1350	4250	7300	300	475	TT/TL	H108E L-3 E-3
	20					5000	8250	400	575		
★ 20.5-25	20	33	17.00/2.0	520	1490	6000	9500	325	450		
	24					6700	10300	400	525		
	28					7500	11500	475	625		
23.5-25	20	35	19.50/2.5	595	1615	7300	10900	300	375		
	24					8000	12500	350	475		
	28					8750	13600	400	550		

H108F

L-3/E-3 PREMIUM DESIGN OTR TYRE
高档设计工程机械轮胎

With excellent controllability,
With excellent resistance to puncture, cutting and wear.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg)		Pressure (kpa)		Type	Code
						50km/h	10km/h	50km/h	10km/h		
★ 17.5-25	16	30	14.00/1.5	445	1350	4250	7300	300	475	TT/TL	H108F L-3 E-3
	20					5000	8250	400	575		
★ 20.5-25	20	33	17.00/2.0	520	1490	6000	9500	325	450		
	24					6700	10300	400	525		
	28					7500	11500	475	625		
23.5-25	20	35	19.50/2.5	595	1615	7300	10900	300	375		
	24					8000	12500	350	475		
	28					8750	13600	400	550		

H109

IND-3S SUPER EXTRA SLICK
工矿用光面平花工程机械轮胎

Suitable for loader and dozer.
Special compound and smooth pattern design is suitable for heat and cut resistant.
Smooth tread with a reinforced sidewall protector for hard working area .



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg) @10km/h	Pressure (kpa) @10km/h	Type	Code
17.5-25	16	30	14.00/1.5	445	1350	7300	475	TT/TL	H109 IND-3S
	20					8250	575		
23.5-25	20	36	19.50/2.5	595	1615	10900	375		
	24					12500	475		
	28					13600	550		

H165

魔 L-4 DEEP TREAD (MINING SERVICE)
王 加深花纹工程机械轮胎

Suitable for wheel loader with deep tread and cut resistant compound for rocky surface and mining service.
Excellent traction and stability comfortable / Long life tread design



Size	PR	T.D. (mm)	S.R.	Size(mm)		Max Loading (kg) @10km/h	Pressure (kpa) @10km/h	Type	Code
				S.W.	O.D.				
★ 17.5-25	20	45.5	14.00/1.5	445	1400	8250	575	TT/TL	H165 L-4
	24					8950	650		
★ 20.5-25	24	51.5	17.00/2.0	520	1560	10300	525		
	28					11500	625		
23.5-25	24	55	19.50/2.5	595	1675	12500	475		
	28					13600	550		
	32					14600	625		
★ 26.5-25	28	54	22.00/3.0	675	1800	15500	450	TL	
	32					17000	525		
★ 29.5-25	28	57	25.00/3.5	750	1920	17500	425		
	34					20000	525		

H166

IND-3/E-3 OUTSTANDING QUALITY MINING & PORT EXTRA
港口、矿山特制工程机械轮胎

Suitable for use in port and mining for long mileage.
Specially designed pattern with extra strong tread and reinforced sidewall protector.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg)		Pressure (kpa)		Type	Code
						50km/h	10km/h	50km/h	10km/h		
16.00-25	28	32	11.25/2.0	430	1550	6700	11500	575	750	TT/TL	H166 IND-3 E-3
	32					7300	12500	650	875		
	36					7750	13600	725	975		
	40					8200	14500	800	1075		
18.00-25	32	36	13.00/2.5	500	1675	8750	15000	575	750	TT/TL	H166 IND-3 E-3
	36					9250	16000	625	850		
	40					9750	17000	700	950		
	44					10300	18000	775	1050		

H167

L-5 EXTRA DEEP TREAD (ROCK SERVICE)
超加深花纹工程机械轮胎

Suitable for wheel loader with extra deep tread and cut resistant compound for rocky surface and mining service.
Excellent traction and stability comfortable / Long life tread design.



Size	PR	T.D. (mm)	S.R.	Size(mm)		Max Loading (kg) @10km/h	Pressure (kpa) @10km/h	Type	Code
				S.W.	O.D.				
17.5-25	20	63.5	14.00/1.5	445	1400	8250	575	TT/TL	H167 L-5
	24					8950	650		
20.5-25	24	71	17.00/2.0	520	1560	10300	525	TT/TL	H167 L-5
	28					11500	625		
23.5-25	24	78.5	19.50/2.5	595	1675	12500	475	TT/TL	H167 L-5
	28					13600	550		
	32					14600	625		
26.5-25	28	87.5	22.00/3.0	675	1800	15500	450	TL	H167 L-5
	32					17000	525		
29.5-25	28	95	25.00/3.5	750	1920	17500	425	TL	H167 L-5
	34					20000	525		

H168 / H168ww

G-2/L-2 SUPER GRADER LOADER SPECIAL
超强平地机和装载机工程机械轮胎

Suitable for wheel loader with extra deep tread and cut resistant compound for rocky surface and mining service.
Excellent traction and stability comfortable / Long life tread design.



H168 H168ww

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg) @ 40km/h		Pressure (kpa) @ 40km/h		Type	Code
						50km/h	10km/h	50km/h	10km/h		
13.00-24	12	24	8.00TG	335	1280	2725	300	TT/TL	H168 H168WW G-2 L-2		
	16					3200	400				
14.00-24	12	25	8.00TG	360	1350	3450	325	TT/TL	H168 H168ECO G-2 L-2		
	16					3650	375				
17.5-25	16	26	14.00/1.5	445	1350	3350	275	TT/TL	H168 H168ECO G-2 L-2		
	20					3650	325				
20.5-25	16	28.5	17.00/2.0	575	1490	4000	225	TT/TL	H168 G-2 L-2		
	20					4500	275				
23.5-25	16	28.5	19.50/2.5	595	1615	4750	200	TT/TL	H168 G-2 L-2		
	20					5450	250				

H169

E-7 HEATMASTER SAND/DESERT TIRE
耐热大师系列沙漠轮胎

The combination of wide tread, round shoulder and streamlined pattern design provides stable ride, good floating force, excellent steering ability on sand ground road surface.
With HEATMASTER compound for desert application.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg)	Pressure (kpa)	Type	Code
9.00-16	8	10	6.50H	860	245	1320	310	TT/TL	H169 E-7
9.00-17	8	10	7J	880	245	1320	310	TT/TL	
14.00-20	18	10	10.00W	1207	355	4125	245	TT/TL	
16.00-20	16	14	10.00W	1323	419	5450	245		
21.00-25	16	14	15.00/3.0	1699	599	10000	245	TL	
29.5-25	28	21	25.00/3.5	1820	687	10000	240		

H176

E-2 HEAVY COUNTRY CROSS TIRE
(SUPER MILITARY APP.)
重性越野轮胎 (军工适用)

Super country-cross pattern is suitable for heavy trucks and other machines.

Military tech design can support using in terrible conditions such as desert, grass, forest, mountain road etc.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @ 60km/h	Pressure (kpa) @ 60km/h	Type	Code
1500X600-635	14	29	500X635	600	1500	5750	380	TT	H176 E-2
	18					6500	470		
	22					7050	550		
1600X600-685	24	29	500X685	600	1600	7900	440		

H178

R-3/C-2/E-7 MULTI-PURPOSE FLOATION TIRE
多用途浮力型轮胎 (压路机及沙漠车辆用胎)

Wide Section for good flotation force and steering ability.

Special for desert transportation and road compactor application.



Size	PR	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @ 10km/h	Pressure (kpa) @ 10km/h	Type	Code
23.1-26	12	DW20	595	1500	5150	200	TT/TL	H178 R-3 C-2 E-7
	14				5600	230		
	16				6150	260		

H179

IND-4/E-4 PORT & MINING SPECIAL
港口矿山专用轮胎

Deep tread depth for longer lifespan
Wide tread design with wearing resistance.
Thick tyre body with power torque quality.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg)		Pressure (kpa)		Type	Code
						50km/h	10km/h	50km/h	10km/h		
★ 18.00-25	32	64.5	13.00/2.5	515	1694	8750	15000	575	750	TL	H179 IND-4 E-4
	36					9250	16000	625	850		
	40					9750	17000	700	950		
	44					10300	18000	775	1050		


H180

IND-4S/L-4S PORT & MINING SPECIAL
港口矿山专用轮胎

Deep tread depth for longer lifespan
Wide tread design with wearing resistance.
Thick tyre body with power torque quality.




Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg)		Pressure (kpa)		Type	Code
						50km/h	10km/h	50km/h	10km/h		
★ 18.00-25	32	58	13.00/2.5	500	1675	8750	15000	575	750	TL	H180 IND-4S L-4S
	36					9250	16000	625	850		
	40					9750	17000	700	950		
	44					10300	18000	775	1050		

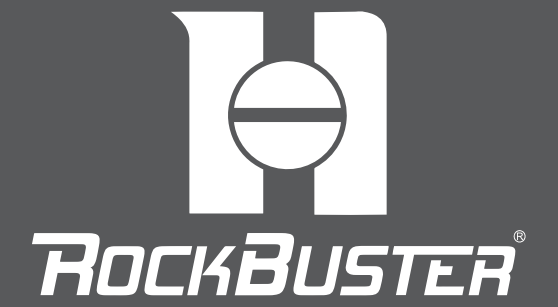

FORKLIFT TYRE

叉车轮胎



<http://www.honghuatyre.com>



H989 INDUSTRIAL MASTER (IND) 常规花纹工业叉车轮胎

Developed for heavy use on forklifts and other industrial vehicles. With its wide and extra deep tread provides stronger traction, longer life and puncture resistance.

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading(kg)	Pressure (kpa)	Code
						25km/h Load		
300-15	18	21	8.0	300	848	5530	830	H989 IND
	20					5940	930	
12.00-20	18	29	8.5	315	1135	6335	790	
	20					7400	900	
10.00-20	16	28	7.5	278	1078	6030	790	
	18					6475	890	
9.00-20	14	26	7.0	259	1025	5195	760	
	16					5595	860	
8.25-15	14	18	6.5	235	840	3775	830	
	16					4050	925	
28X9-15 (8.15-15) (225/70-15)	14	19	7.0	220	710	3050	970	
	16					3115	1000	
7.50-15	14	21	6.0	215	780	3375	925	
	16					3550	1000	
7.00-15	12	21	5.5	200	750	2870	860	
	14					3140	1000	
8.25-12	12	18	6.5	235	765	3060	720	
7.00-12	12	13	5.00S	190	676	2375	860	
	14					2590	1000	
6.50-10	10	12	5.00F	175	590	1655	790	
	12					1895	1000	
7.00-9	10	13	5.00S	190	590	1995	860	
6.00-9	10	11	4.00F	160	540	1502	860	
	12					1675	1030	
5.00-8	10	11	3.50D	137	470	1150	1000	
16X6-8	10	13	4.33R	152	425	1085	860	
18X7-8 (180/70-8)	10	15	4.33R	173	465	1310	760	
	14					1505	970	
	16					1695	1000	
21X8-9 (200/75-9)	10	15	6.00E	200	535	1545	620	
	14					2040	1000	
23X9-10	12	16	6.50F	225	595	2345	760	
	14					2585	900	
27X10-12	14	16	8.00G	255	690	2810	1030	
	16					3285	860	
						3585	1000	



TW898 EXTRA POWER STRONG INDUSTRIAL 超级宽厚花纹工业叉车轮胎

Pattern design with wide contact area increases traction. Reinforced tie bar between the zig-zag pattern. New compound for outstanding durability / longer life.

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg)	Pressure (kpa)	Type	Code
8.25-15	16	25	6.5	242	845	4050	925	TT	TW898 IND
7.50-16	16	22	6.00S	212	810	3870	880		

H990 XTRA WALL AND MASSIVE TREAD BLOCK 新宽厚花纹工业叉车轮胎


New pattern design supports longer working life. Special compound could be used in much more hard working sites. Non-symmetric tread offers more traction power and better wear-ability.

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg)	Pressure (kpa)	Type	Code
8.25-15	16	22	6.5	242	840	4050	925	TT	H990 IND
28X9-15	14	22	7.0	220	713	3050	970		
	16					3115	1000		
7.00-12	14	20	5.00S	192	676	2590	1000		
6.50-10	12	21	5.00F	185	590	1895	1000		
7.00-9	10	19	5.00S	192	590	1895	860		
6.00-9	12	18	4.00F	168	540	1675	1030		
5.00-8	10	16	3.50D	138	470	1150	1000		
18X7-8	14	18	4.33R	173	465	1505	970		
	16					1695	1000		

DT1000 SUPER DEEP TREAD & WIDE CROWN SERIES 超深花纹工业叉车轮胎


Developed for heavy use on forklifts and other industrial vehicles. With its wide and extra deep tread provides stronger traction, longer life and puncture resistance.

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg)	Pressure (kpa)	Type	Code
8.25-20	18	35	6.5	235	975	5300	950	TT	DT1000 IND
8.25-15	16	33.5	6.5	246	851	4050	925		
28X9-15	16	28	7.0	224	713	3115	1000		
7.00-12	14	33.5	5.00S	200	680	2590	1000		
6.50-10	12	31	5.00F	185	599	1865	1000		
6.00-9	12	26	4.00F	168	555	1675	1030		
5.00-8	10	23	3.50D	142	470	1150	1000		
28X9-15	16	28	7.0	224	713	3115	1000	TT	DT1000+ IND
	24					5670	1200		

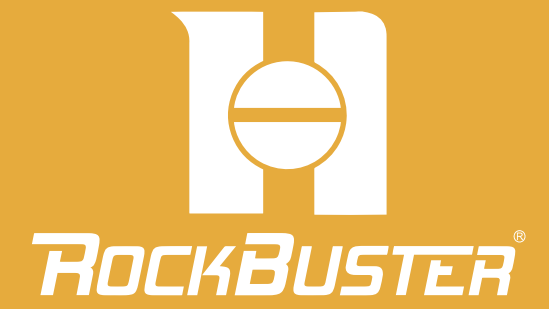

SPECIALITY IND TYRE

特种工业轮胎



<http://www.honghuatyre.com>

AS2000

L-2 URBAN INDUSTRIAL
L-2 城市用挖掘机、工业拖车轮胎

Developed for urban excavator and industrial trailer vehicles, by new compound for outstanding durability. Extra deep tread provides longer life and puncture resistance. Reinforced tie bar between the zig-zag block pattern.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg)	Pressure (kpa)	Type	Code
9.00-20	16	28	7.0	260	1025	4060	740	TT	AS2000 L-2 NHS

H966

G-2/L-2 EXCAVATOR TYRE(X'C)
G-2/L-2 挖掘机轮胎系列

Optimized pattern design for excavator. Excellent abrasion and traction and self-cleaning.



H966A H966B

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @ 10km/h	Pressure (kpa) @ 10km/h	Type	Code
8.25-20	14	20	6.5	235	992	3865	830	TT	H966A G-2/L-2
9.00-20	16	22	7.0	259	1038	4725	860		
10.00-20	18	22	7.5	278	1073	5470	890	TT	H966A G-2/L-2
11.00-20	16	24	8.0	293	1105	5405	760		
	18					6000	825		
9.00-20	16	25	7.0	259	1040	4725	860	TT	H966B G-2

H967

G-2/L-2 EXCAVATOR TYRE (ECO-USE)
G-2/L-2 经济型挖掘机轮胎



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @ 10km/h	Pressure (kpa) @ 10km/h	Type	Code
9.00-20	16	20	7.0	259	1038	4725	860	TT	H967 G-2/L-2
10.00-20	18	20	7.5	278	1073	5470	890		



SKS-1 (R-4) SKS-1+ (R-4) TW171 (L-2) SKS-2 (NEW L-2)

SKS-1/1+/TW171/2

SKID STEER TYRE/INDUSTRIAL TYRE
工业车辆轮胎/特种工业轮胎

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg)	Pressure (kpa)	Type	Code
27X8.5-15	8	13	7JA	215	678	1030	350	TL	SKS-1 R-4
11L-16	12	15	W8L	280	835	1395	420		
10-16.5	10	19	8.25	264	773	2135	520		
	12					2375	620		
12-16.5	12	19	9.75	307	831	2865	550		
	14					3075	620		
14-17.5	14	19	10.5	349	921	3875	550		
15-19.5	14	21	11.75	389	1019	4565	485		
	16					4935	550		
12-16.5	14	22	9.75	307	831	3075	620		
12-16.5	14	21	9.75	310	835	3075	620	TL	TW171 L-2
12-16.5	14	25	9.75	314	840	3075	620	TL	SKS-2 NEW L-2

SKS-1 R-4 STANDARD

Optimized pattern design for loader/grader with excellent traction and self-cleaning in a muddy ground.

SKS-1+ R-4 ADVANCED

Optimized pattern design for loader/grader with excellent traction and self-cleaning in a muddy ground.

TW171 L-2 ADVANCED

Optimized pattern design for loader/grader with excellent traction and self-cleaning in a muddy ground.

SKS-2 NEW L-2 PRIMUM

For loaders and dozers operations on rock, coal and earth. Separate lugs and tapered for greater traction and self-cleaning. Extra wide tread profile for better land ratio and High floating force.



SKS-3 (L-5)

SKS-4 (R-4+)

SKS-5 (L-4)

SKS-3/4/5 SKID STEER TYRE/INDUSTRIAL TYRE 工业车辆轮胎/特种工业轮胎

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg)	Pressure (kpa)	Type	Code
10-16.5	12	35	8.25	270	785	2865	550	TL	SKS-3 L-5
12-16.5	14	42	9.75	314	845	3075	620		
12.5/80-18	16	34	9	308	985	3130	490		
19.5L-24	16	38	DW16	495	1339	4625	300		
10-16.5	12	27	8.25	270	785	2865	550	TL	SKS-4 R-4+
12-16.5	14	35	9.75	314	845	3075	620		
12.5/80-18	16	30	9	308	985	3130	490		
10-16.5	12	32	8.25	270	785	2865	550	TL	SKS-5 L-4
12-16.5	14	40	9.75	314	845	3075	620		

SKS-3 L-5 EXTRA DEEP

Application to Skid Steer loader and scraper tyre for hard working area. Good wear resistance, with extra deep tread and side-skidding resistance.

SKS-4 R-4+ ALL TERRAIN

For loaders and dozers operations on rock, coal and earth. Extra wide tread profile for better land ratio and High floating force.

SKS-5 L-4 DEEP

Application to Skid Steer loader and scraper tyre for hard working area. Good wear resistance, with extra deep tread and side-skidding resistance.



SKS-X

SKS-Y

SKS-Z

SKS-X/Y/Z SKID STEER TYRE 工业车辆轮胎

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg)	Pressure (kpa)	Type	Code
33X12-16.5	10	14	9.75	310	840	2540	450	TL	SKS-X Off Road
33X12-16.5	10	14	9.75	310	840	2540	450		SKS-Y Sandtrack
33X12-16.5	10	14	9.75	310	840	2540	450		SKS-Z Turf



H656 R-4+ A/T INDUSTRIAL TYRE R-4+ A/T 特种工业轮胎

All terrain tread design for better performance in machine working. Resistance to cuts, abrasions and high load capacity.

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @ 30km/h	Pressure (kpa) @ 30km/h	Type	Code
16.9-24	14	26	W15L	430	1323	3530	300	TL	H656 R-4+
16.9-28	14	26	W15L	430	1423	3765	300		

H658 R-4 INDUSTRIAL TYRE R-4 特种工业轮胎

Very good traction and better tire life.
Good resistance to tearing and cracking.
Resistance to cuts, abrasions and high load capacity.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @ 40km/h	Pressure (kpa) @ 40km/h	Type	Code
16.9-24	12	27	W15L	430	1323	3250	260	TL	H658 R-4
16.9-28	12	27	W15L	430	1423	3450	260		
18.4-26	12	27	W16L	467	1438	3990	250		
17.5L-24	12	26	W15L	445	1253	3000	260		
19.5L-24	12	27	DW16	495	1328	3450	230		
21L-24	12	29	DW18	533	1388	3880	220		
	16					4200	250		

H659 R-4 TRACTION IMPLEMENT/BACKHOE R-4 特种工业轮胎

Excellent traction and flushing / Good resistance to cracking.
Strengthen and stabilize tread under severe operating condition.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @ 30km/h	Pressure (kpa) @ 30km/h	Type	Code
10.5/80-18	10	22	9	274	905	1935	370	TL	H659 R-4
	12					2150	430		
12.5/80-18	12	26	9	308	985	2625	370		
	14					2910	430		
	16					3130	490		

H660 R-4 INDUSTRIAL TYRE R-4 特种工业用胎

Very good traction and better tire life.
Good resistance to tearing and cracking.
Resistance to cuts, abrasions and high load capacity.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @ 40km/h	Pressure (kpa) @ 40km/h	Type	Code
19.5L-24	12	27	DW16	495	1328	3450	230	TL	H660 R-4

H661 F-3 INDUSTRIAL FRONT F-3 特种工业轮胎

Husky industrial rib design, wide profile for front backhoe loader service.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @ 30km/h	Pressure (kpa) @ 30km/h	Type	Code
11L-15	10	12	W8L	280	810	1190	340	TL	H661 F-3
	12					1355	420		
11L-16	10	12	W8L	280	835	1240	340		
	12					1395	420		

H663 I-1 FARM SPECIALIST IMPLEMENT I-1 农机具轮胎

Multi rib farm tire designed for flotation for use on farm implement, wagons, tanks, carts and other pull behind vehicles.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @30km/h	Pressure (kpa) @30km/h	Type	Code
9.5L-15	8	8	8LB	240	765	1100	280	TL	H663 I-1
	10					1310	340		
11L-15	8	9	W8L	280	775	1130	220		
	10					1285	280		
	12					1345	340		
12.5L-15	8	9	W10L	317	823	1350	220		
	12					1730	330		
	14					1830	360		
11L-16	8	9	W8L	280	800	1175	220		
	10					1340	280		
	12					1515	340		

H665 DEEP R-4 TRACTION STAR 加深 R-4 强大牵引力工农业用胎

Best for tractor, telehandler, backhoe loader, compactor. Excellent traction, self-cleaning and cutting resistance



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg)	Pressure (kpa)	Type	Code
405/70-20 (16/70-20)	14	37	13.0	407	1076	3250	350	TL	H665 DR-4
405/70-24 (16/70-24)	14	37	13.0	407	1178	3550	350		

H666 R-4 BOOM LIFT TYRE R-4 高空作业车/登高车轮胎

Good performance for boom lift and other air-work machines. Stable support with excellent wear resistant.




H664 R-1 TRACTION STAR (IND & AG) R-1 强大牵引力工农业用胎

Best for tractor, telehandler, backhoe loader, compactor. Excellent traction, self-cleaning and cutting resistance



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg)	Pressure (kpa)	Type	Code
15.5/80-24 (400/80-24)	12	35	13.0	394	1262	2900	300	TL	H664 R-1
	16					3350	400		

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg)	Pressure (kpa)	Type	Code
☆ 315/55D20	12	18	11.00	319	830	3360	560	TL	H666 R-4
☆ 355/55D625	14	23	11.75	360	936	3450	520		
☆ 15-625	16	25	13.00	385	1018	5580	690		
☆ 18-625	16	25	15.00	455	1046	6900	690		
☆ 445/50D710	18	25	W15	445	1189	7300	690		
	20					7740	790		

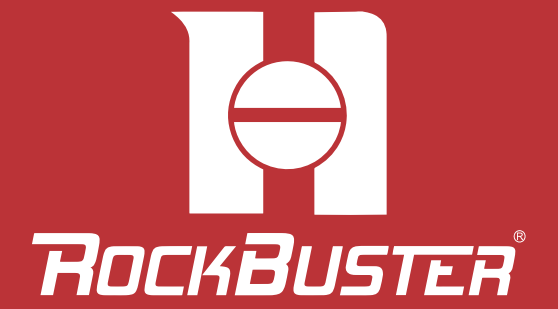

SUPER SOLID TYRE

实心轮胎



<http://www.honghuatyre.com>

H991A XTRA WALL AND MASSIVE TREAD BLOCK SOLID
超强充气式轮辋实心轮胎

High quality raw material support and unique formula design.



H992A SUPER STRONG LARGE BLOCK SOLID
大块花纹充气式轮辋实心轮胎

Litter rolling resistance & low heat generating.
Little energy conservation & strong rockfall resistance.
It's the best choice for balanced forklift and other industrial vehicles.



Size	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading(kg)					Code
					Forklift				Other Industrial 10km/h	
					10km/h		16km/h			
					Load	Rota	Load	Rota		
300-15 (315/70-15)	29	8.0	300	838	6895	5305	6300	4845	5310	H991A SOLID

Size	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading(kg)					Code
					Forklift				Other Industrial 10km/h	
					10km/h		16km/h			
					Load	Rota	Load	Rota		
4.00-8	20	3.0	121	423	1090	840	995	765	840	H992A SOLID
		3.75	125	423	1175	905	1080	830	910	
▲ 5.00-8	24	3.0	146	469	1255	965	1145	880	960	
▲ 18X7-8	24	4.33	170	457	2430	1870	2215	1705	1870	
▲ 6.00-9	24	4.0	160	545	1975	1520	1805	1390	1520	
▲ 6.50-10	28	5.0	178	597	2715	2090	2485	1910	2095	
	28	5.0	185	578	2670	2005	2440	1875	2055	
▲ 7.00-12	29	5.0	192	683	3105	2390	2835	2180	2390	
	38	6.5	236	735	3425	2635	3125	2405	2635	
▲ 28X9-15 (8.15-15) (225/75-15)	35	7.0	225	706	4060	3125	3710	2855	3125	
▲ 8.25-15	38	6.5	236	847	5085	3910	4640	3570	3910	

H991B EXCELLENT VIBRATION CONTROL PATTERN SOLID
港口机车专用充气式轮辋实心轮胎

Aggressive pattern for port trailer and forklift.
High load & excellent wear-resistance.



Size	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading(kg)					Code
					Forklift				Other Industrial 10km/h	
					10km/h		16km/h			
					Load	Rota	Load	Rota		
9.00-20	40	6.5	259	1038	6160	5153	5630	4690	4745	H991B SOLID
9.00-20		7.0	259	1038	6365	5305	5815	4845	4905	
10.00-20	40	7.5	278	1073	7075	5895	6460	5385	5450	
10.00-20		8.0	278	1073	7300	6085	6670	5560	5630	
11.00-20	45	7.5	300	1095	7470	6225	6820	5685	5750	
11.00-20		8.0	300	1095	7715	6430	7045	5870	5940	
12.00-20	45	8.0	310	1180	8640	7200	7885	6570	6650	
12.00-20		8.5	310	1180	8920	7435	8140	6785	6865	

- ▲ CLICK/QUICK type solid tyre available
- ▲ 此型号可以提供快装式(林德式)实心轮胎.



H992B EXTRA POWER STRONG INDUSTRIAL SOLID
小块花纹高档充气式轮辋实心轮胎

High quality raw material support and unique formula design.
The tyre enjoys outstanding performance at all aspects.

Size	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading(kg)					Code
					Forklift				Other Industrial 10km/h	
					10km/h		16km/h			
Load	Rota	Load	Rota							
5.00-8	24	3.0	146	469	1255	965	1145	880	960	H992B SOLID
18X7-8	24	4.33	170	457	2430	1870	2215	1705	1870	
6.00-9	24	4.0	160	545	1975	1520	1805	1390	1520	
6.50-10	28	5.0	178	597	2715	2090	2485	1910	2095	
7.00-9	28	5.0	185	578	2670	2005	2440	1875	2055	
7.00-12	29	5.0	192	683	3105	2390	2835	2180	2390	
8.25-12	38	6.5	236	735	3425	2635	3125	2405	2635	
28X9-15 (8.15-15) (225/75-15)	35	7.0	225	706	4060	3125	3710	2855	3125	
8.25-15	38	6.5	236	847	5085	3910	4640	3570	3910	

H993 PERFECT BALANCE INNOVATIVE TREAD SOLID
均衡型花纹充气式轮辋实心轮胎

High land ratio for longer life.
It's the best choice for balanced forklift and other industrial vehicles.



Size	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading(kg)					Code
					Forklift				Other Industrial 10km/h	
					10km/h		16km/h			
Load	Rota	Load	Rota							
16X6-8	17	4.33	162	418	1545	1190	1410	1085	1185	H993 SOLID
21X8-9	27	6.0	207	535	2890	2225	2645	2035	2230	
23X9-10	26	6.5	225	595	3730	2870	3405	2620	2865	



H994 KING STAR SOLID
超高档实心轮胎

Best cutting resistance.
Expert low rolling resistance.
Longest lifespan.

Size	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading(kg)					Code
					Forklift				Other Industrial 10km/h	
					10km/h		16km/h			
Load	Rota	Load	Rota							
5.00-8	24	3.0	146	469	1255	965	1145	880	960	H994 SOLID
★ 18X7-8	24	4.33	170	457	2430	1870	2215	1705	1870	
6.00-9	24	4.0	160	545	1975	1520	1805	1390	1520	
6.50-10	28	5.0	178	597	2715	2090	2485	1910	2095	
★ 7.00-9	28	5.0	185	578	2670	2005	2440	1875	2055	
7.00-12	29	5.0	192	683	3105	2390	2835	2180	2390	
★ 8.25-12	38	6.5	236	735	3425	2635	3125	2405	2635	
28X9-15 (8.15-15) (225/75-15)	35	7.0	225	706	4060	3125	3710	2855	3125	
★ 8.25-15	38	6.5	236	847	5085	3910	4640	3570	3910	
★ 16X6-8	17	4.33	162	418	1545	1190	1410	1085	1185	
★ 21X8-9	27	6.0	207	535	2890	2225	2645	2035	2230	
★ 23X9-10	26	6.5	225	595	3730	2870	3405	2620	2865	
★ 9.00-20	40	6.5	259	1038	6160	5135	5630	4690	4745	
★ 9.00-20		7.0	259	1038	6365	5305	5815	4845	4905	
★ 10.00-20	40	7.5	278	1073	7075	5895	6460	5385	5450	
★ 10.00-20		8.0	278	1073	7300	6085	6670	5560	5630	
★ 11.00-20	45	7.5	300	1095	7470	6225	6820	5685	5750	
★ 11.00-20		8.0	300	1095	7715	6430	7045	5870	5940	
★ 12.00-20	45	8.0	310	1180	8640	7200	7885	6570	6650	
★ 12.00-20		8.5	310	1180	8920	7435	8140	6785	6865	

H992A NON-MARKING SOLID

无痕环保实心轮胎

Environmental friendly.
Static electricity free.



TW993 NON-MARKING SOLID FOR AIRPORT WORKING

机场专用无痕环保浅纹实心轮胎

High quality raw material support and unique formula design.
The tyre enjoys outstanding performance at all aspects.



Size	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading(kg)				Code	
					Forklift					Other Industrial 10km/h
					10km/h		16km/h			
Load	Rota	Load	Rota							
4.00-8	4	3.75	110	326	1090	840	995	765	840	TW993

TW994 NON-MARKING SOLID FOR AIRPORT WORKING - SMOOTH

机场专用无痕环保光面实心轮胎

Long life / Low rolling resistance / Environmental friendly.



Size	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading(kg)				Code	
					Forklift					Other Industrial 10km/h
					10km/h		16km/h			
Load	Rota	Load	Rota							
200-8										TW994

H995 NON-MARKING SOLID WITH WHEEL MOUNTED

无痕环保实心轮胎


Environmental friendly.
Static electricity free.



Size	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading(kg)				Code	
					Forklift					Other Industrial 10km/h
					10km/h		16km/h			
Load	Rota	Load	Rota							
406X125										H995

Size	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading(kg)				Code	
					Forklift					Other Industrial 10km/h
					10km/h		16km/h			
Load	Rota	Load	Rota							
4.00-8	20	3.0	121	423	1090	840	995	765	840	H992A SOLID
		3.75	125	423	1175	905	1080	830	910	
5.00-8	24	3.0	146	469	1255	965	1145	880	960	
18X7-8	24	4.33	170	457	2430	1870	2215	1705	1870	
6.00-9	24	4.0	160	545	1975	1520	1805	1390	1520	
6.50-10	28	5.0	178	597	2715	2090	2485	1910	2095	
7.00-9	28	5.0	185	578	2670	2005	2440	1875	2055	
7.00-12	29	5.0	192	683	3105	2390	2835	2180	2390	
8.25-12	38	6.5	236	735	3425	2635	3125	2405	2635	
8.25-15	38	6.5	236	847	5085	3910	4640	3570	3910	
28X9-15 (8.15-15) (225/75-15)	35	7.0	225	706	4060	3125	3710	2855	3125	

- NON-MARKING SOLID TIRES OF H991A, H991B, H992B, AND H993 ARE AVAILABLE ALSO.
- 我们也可以生产具有H991A, H991B, H992B, 以及H993花纹的无痕环保实心轮胎。
- OTHER COLORS ARE AVAILABLE TOO.
- 可选其他颜色。

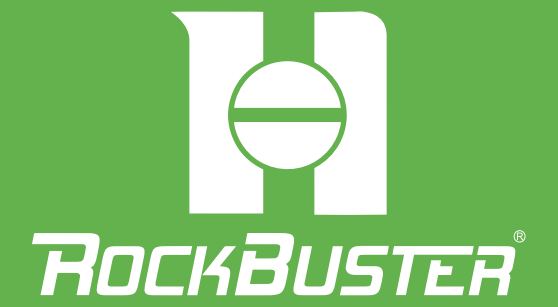

AGRICULTURAL TYRE

农业轮胎



<http://www.honghuatyre.com>



H657-1 **H657-2** **H657-3** **H657-4** **H657-5**

H657-1/2/3/4/5 R-1 SUPER FARM TYRE
R-1 人字驱动轮以及前轮用农业轮胎

For general farm tractors.
Provides good cutting resistance and longer lifetime.

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @ 30km/h	Pressure (kpa) @ 30km/h	Type	Code
6.00-12	6	20	4.50E	165	640	405	250	TT	H657-1 R-1
6.00-12	6	20	4.50E	165	640	405	250		H657-2 R-1
6.00-12	6	23	4.50E	165	640	405	250		H657-3 R-1
6.00-16	6	24	4.50E	165	745	495	250		H657-4 R-1
7.50-16	6	22	5.50F	205	810	650	210		H657-5 R-1
	8					800	280		



H657-6 R-1 SUPER FARM TYRE FOR DRIVE WHEEL
R-1 人字驱动轮农业轮胎

Tractor tire for drive wheel.
Powerful traction and good cutting resistance.

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @ 30km/h	Pressure (kpa) @ 30km/h	Type	Code
11.2-24	10	32	W10	285	1105	1380	300	TT	H657-6 R-1
14.9-24	10	38	W13	378	1265	1990	230		
16.9-28	10	39	W15L	430	1435	2380	200		
	12					2580	230		
16.9-30	12	39	W15L	430	1485	2730	240		
16.9-34	10	39	W15L	430	1585	2605	200		
	12					2945	240		
18.4-34	12	36	W16L	467	1655	3375	230		

H657-7 R-1 SUPER FARM TYRE FOR DRIVE WHEEL
R-1 人字驱动轮农业轮胎

Tractor tire for drive wheel.
Good traction and high grip ability.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @ 30km/h	Pressure (kpa) @ 30km/h	Type	Code
7.50-20	6	25.5	5.50F	205	910	760	210	TT	H657-7 R-1
	8					900	250		
8.3-24	6	30	W7	210	995	810	240		
	8					950	300		
9.5-20	8	28	W8	240	950	955	300		
	10					1190	370		
9.5-24	8	31	W8	240	1050	1110	280		
	10					1300	370		
11.2-28	8	35	W10	285	1205	1305	240		
	10					1515	300		

H657-8/10

R-1 SUPER FARM TYRE FOR DRIVE WHEEL
R-1 人字驱动轮农业轮胎

Tractor tire for drive wheel and load wheel.
Excellent traction, self-cleaning and cutting resistance.



H657-8 H657-10

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @ 30km/h	Pressure (kpa) @ 30km/h	Type	Code
8.3-20	6	28	W7	210	895	695	240	TT	H657-8 R-1
	8					880	300		
9.5-20	8	27	W8	240	950	955	280	TT	H657-10 R-1
	10					1190	370		

H657-11/12

R-1 SUPER FARM TYRE FOR DRIVE WHEEL
R-1 人字驱动轮农业轮胎

Tractor tire for drive wheel.
Powerful traction and good cutting resistance.



H657-11 H657-12

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @ 30km/h	Pressure (kpa) @ 30km/h	Type	Code
14.9-26	10	42	W13	378	1315	2055	230	TT	H657-11 R-1
	12					2310	260		
18.4-30	12	35	W16L	467	1550	3180	230	TT	H657-12 R-1
15.5-38	10	34	W14L	395	1570	2320	230		
	12					2700	260		



H657-13 H657-14 H657-15

H657-13/14/15

R-1(LS-1) SUPER TRACTOR & HARVESTER TYRE
R-1(LS-1) 超强拖拉机和收割机轮胎

Tractor/Harvester tire for drive wheel and load wheel.
Excellent traction, self-cleaning and cutting resistance.

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @ 30km/h	Pressure (kpa) @ 30km/h	Type	Code
12.4-24	8	36	W11	315	1160	1415	230	TT	H657-13 R-1/LS-1
	10					1650	280		
12.4-28	8	36	W11	315	1260	1510	230	TT	H657-14 R-1/LS-1
	10					1760	280		
14.9-24	10	38	W13	378	1265	1990	230	TT	H657-14 R-1/LS-1
14.9-28	10	38	W13	378	1365	2120	230		
18.4-38	12	41	W16L	467	1755	3575	230	TT	H657-15 R-1/LS-1
15-24	10	37	DW14	410	1330	2800	280		



H657-16 CR-1 FARM TYRE CR-1 农业拖拉机中耕轮胎

Tractor tire for drive wheel with good cutting resistance for longer tire life.

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @ 30km/h	Pressure (kpa) @ 30km/h	Type	Code
11-38	10	35	W10	305	1540	1965	200	TT	H657-16 CR-1
12.4-48	12	36	W11	315	1760	2975	320		
14.9-48	12	38	W13	378	1875	3350	270		

H657-17/18

R-1/HR-1 SUPER FARM TYRE (DEEP TREAD)
R-1/HR-1 加高人字花纹拖拉机轮胎

Specially designed lug profiles for full traction power and self-cleaning.



H657-17

H657-18

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @ 30km/h	Pressure (kpa) @ 30km/h	Type	Code
6.00-12	6	30	4.50E	165	640	405	250	TT	H657-17 R-1/HR-1
6.00-16	6	28	4.50E	165	745	495	250	TT	H657-18 R-1/HR-1

H657-19/20

R-1/HR-1 SUPER FARM TYRE (EXTRA DEEP TREAD)
R-1/HR-1 超加高加宽人字花纹拖拉机轮胎 (水旱两用)

Powerful pattern & Wear resistance.
Longer life & High durability.



H657-19

H657-20

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @ 30km/h	Pressure (kpa) @ 30km/h	Type	Code
6.50-16	6	38	5.00F	180	765	565	250	TT	H657-19 R-1/HR-1
9.5-24	8	42	W8	240	1050	1110	280	TT	H657-20 R-1/HR-1
	10					1300	370		
11.2-24	10	42	W10	285	1105	1380	300		

H657-21

R-1/HR-1 SUPER FARM TYRE (DEEP TREAD)
R-1/HR-1 加高人字花纹拖拉机轮胎

Specially designed lug profiles for full traction power and self-cleaning.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @ 30km/h	Pressure (kpa) @ 30km/h	Type	Code
6.00-16	6	31	4.50E	165	745	495	250	TT	H657-21 R-1/HR-1
6.50-16	6	32	5.00F	180	765	565	250		
7.50-16	6	33	5.50F	205	810	650	210		
	8					800	280		
8.3-20	6	38	W7	210	895	695	240		
	8					880	300		
8.3-24	6	38	W7	210	995	810	240		
	8					950	300		
9.5-20	8	42	W8	240	950	955	280		
	10					1190	370		
9.5-24	8	42	W8	240	1050	1110	280		
	10					1300	370		
11.2-24	10	42	W10	285	1105	1380	300		
11.2-28	8	45	W10	285	1205	1305	240		
	10					1515	300		
12.4-28	8	45	W11	315	1260	1510	230		
	10					1760	280		
13.6-24	10	48	W12	345	1210	1790	250		
16.9-34	10	50	W15L	430	1585	2605	200		
	12					2945	240		
12-38	8	37	DW11	356	1575	1570	140		
	10					1850	180		
11-32	6	33	W10	305	1360	1000	140		
	8					1250	180		



H657-22 R-2 HARVESTER TYRE R-2 蔗田以及稻田型收割机轮胎

Larger traction tire for drive wheel.
Powerful traction, excellent wear resistance and self-cleaning.

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @ 30km/h	Pressure (kpa) @ 30km/h	Type	Code
9.5-38	10	52	W8	240	1435	1400	280	TT	H657-22 R-2
19.5L-24	12	76	DW16	495	1382	2145	210		
16.9-28	12	69	W15L	430	1478	2580	230		
18.4-30	12	81	W16L	467	1597	3180	230		
23.1-26	14	89	DW20	587	1662	3970	200		
28L-26	14	89	DW25	715	1672	4245	170		
20.8-38	12	77	W18L	528	1887	4000	200		

H657-23 R-1/IR-1 IRRIGATION TYRE R-1/IR-1 人字灌溉农业胎

Special design for irrigation application.
Good self cleaning property and sufficient traction.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @ 30km/h	Pressure (kpa) @ 30km/h	Type	Code
★ 11.2-24	6	28.5	W10	1103	285	1045	180	TT	H657-23 R-1/IR-1
★ 12.4-24	8	28.5	W11	1160	315	1415	230		
★ 14.9-24	8	31	W13	1265	378	1760	180		
★ 11.2-38	10	30	W10	1448	285	2000	170		

H657-24 M-Z HARVESTER FRONT WHEEL M-Z 收割机前轮轮胎

Comfortable operation.
Longer tyre lifetime.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @ 30km/h	Pressure (kpa) @ 30km/h	Type	Code
12.00-18	10	18	9.00V	325	1085	1800	320	TT	H657-24 R-1
	12					2300	420		



H657-25 PR-1 SUPER PADDY FIELD TYRE PR-1 高档水田轮胎

Powerful traction, excellent driving stability and Steering Accuracy.
Longer life and High durability, Wear resistance, Outstanding Cold & Heat resistance.

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @ 30km/h	Pressure (kpa) @ 30km/h	Type	Code
6.00-12	6	45.5	4.5E	165	690	425	270	TT	H657-25 PR-1
6.50-16	8	57	5.00F	165	830	565	250		
7.50-16	10	64	5.50F	195	890	750	300		
8.3-20	10	64	W7	210	950	970	270		
8.3-24	10	64	W7	210	1050	1135	270		
9.5-20	10	78	W8	240	1050	1140	240		
9.5-24	10	78	W8	240	1150	1345	240		
11-23	12	90	W10	305	1460	1080	160		
11.2-24	12	83	W10	285	1205	1465	210		
12.4-26	12	86	W11	315	1265	1728	200		
12.4-28	12	86	W11	315	1315	1785	200		
13.6-24	12	90	W12	345	1210	1790	250		
13.6-38	12	90	W12	345	1710	2675	230		
14.9-24	12	90	W13	378	1260	1990	230		
14.9-26	12	90	W13	378	1315	2055	230		
14.9-28	12	90	W13	378	1365	2120	230		
14.9-30	12	95	W13	378	1415	2190	230		
16.9-30	12	95	W15L	430	1485	2730	240		
16.9-34	12	95	W15L	430	1585	2605	200		
18.4-34	12	95	W16L	467	1655	3375	230		
18.4-38	12	95	W16L	467	1755	3575	230		



H657-26 PR-1 SUPER PADDY FIELD TYRE PR-1 高档水田轮胎

Powerful traction, excellent driving stability and Steering Accuracy.
Longer life and High durability, Wear resistance, Outstanding Cold & Heat resistance.

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @ 30km/h	Pressure (kpa) @ 30km/h	Type	Code
11-32	12	90	W10	305	1460	1080	160	TT	H657-26 PR-1
13.6-24	12	90	W12	345	1210	1790	250		
14.9-24	12	90	W13	378	1265	1990	230		
14.9-26	12	90	W13	378	1315	2055	230		
14.9-28	12	90	W13	378	1365	2120	230		
16.9-28	12	90	W15L	430	1478	2580	230		
14.9-30	12	95	W13	378	1415	2190	230		
16.9-30	12	95	W15L	430	1485	2730	240		
16.9-34	12	95	W15L	430	1585	2605	200		
18.4-38	12	95	W16L	467	1755	3575	230		
20.8-38	12	95	W18L	528	1887	4000	200		



H657-27

R-1/HR-1 OVER SIZE AG TYRE FOR DRIVE WHEEL
FIELD & ROAD USE, DOUBLE DUTY

R-1/HR-1 超大尺寸人字驱动轮农业轮胎
田路两用轮胎, 双倍载重保证

Confident grip & good self-cleaning
Extra deep lug depth for long wearing.
Import design.

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @ 30km/h	Pressure (kpa) @ 30km/h	Type	Code
☆ 12.4-28	10	39	W11	315	1276	1760	280	TT	H657-27 R-1 HR-1
☆ 13.6-28	10	40	W12	345	1320	1910	250		
☆ 14.9-28	10	40	W13	378	165	2120	230		
☆ 16.9-30	12	40	W15L	430	1485	2730	240		
☆ 18.4-30 (18.4/15-30)	12	44	W16L	467	1550	3180	230		
☆ 15.5-38	12	42	W14L	395	1570	2700	260		



H889

H206

H207

H208

H889 H206 H207 H208

AG FRONT WHEEL & TRAILER WHEEL
农用车导向轮和拖车轮用轮胎

Long tyre life with wear resistance.

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @ 30km/h	Pressure (kpa) @ 30km/h	Type	Code
4.50-16	6	7	3.00D	130	655	400	390	TT	H889
5.00-14	4	7	3.00D	130	620	365	340		
4.50-14	4	7	3.00D	122	606	345	340		
4.00-14	4	7	3.00D	110	590	270	340		
4.50-12	4	6	3.00D	122	550	307	340		
5.00-14	8	9.5	3.00D	130	620	500	420	TT	H206
4.50-14	8	8	3.00D	122	606	400	420	TT	H207
6.00-16	6	8	4.00E	160	740	560	340	TT	H208
5.50-16	6	8	4.00E	150	710	525	370		
5.00-16	6	7.5	4.00E	142	680	500	370		
4.50-16	6	7	3.00D	130	655	400	390		
4.00-14	4	7	3.00D	110	590	270	340		
4.00-12	4	7	3.00D	110	535	250	340		



H209A

H209B

H209A H209B F-2 TRIPLE RIB FARM STEERING F-2 农用车导向轮胎


Better Steering with good stability / Self cleaning and damage resistance.
Better tire life / High load capacity.

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @ 30km/h	Pressure (kpa) @ 30km/h	Type	Code
4.00-14	4	7	3.00D	110	590	270	34	TT	H209A F-2
4.00-16	4	8	3.00D	110	640	300	340		
5.00-15	6	9.5	4J	140	665	465	420		
5.50-16	6	13	4.00E	10	710	525	370		
7.50-16	8	15	5.50F	205	810	870	370		
10.00-16	10	23	W8L	275	910	1325	340	TL	
11.00-16	10	23	W10L	315	970	1485	310		
7.50-16	10	19	5.50F	210	810	1000	450	TT/TL	H209B F-2



MINING TYRE

矿山轮胎

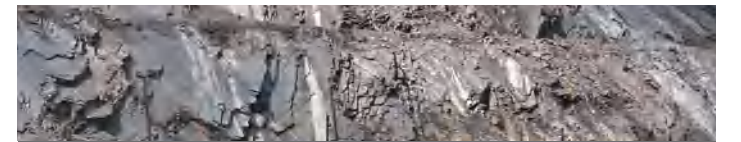

<http://www.honghuatyre.com>

H988 MINING TRUCK TIRE

常规矿山系列轮胎

For dump trucks on mining and logging service.
Deeper tread pattern for powerful traction and long mileage.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg)		Pressure (kpa)	Load Index	Code
						Dual	Single			
12.00-20	20	32	8.5	315	1145	3450	4000	810/880	151/156	H988
11.00-20	18	30	8.0	293	1105	3150	3650	840/910	148/153	
10.00-20	18	30	7.5	278	1073	2900	3350	840/910	145/150	
9.00-20	16	25	7.0	259	1038	2500	2900	810/880	140/145	
8.25-20	16	20	6.5	240	992	2180	2460	840/910	135/139	
9.00-16	16	22	6.50H	255	902	1850	2120	730	129/134	
8.25-16	16	18	6.50H	235	867	1600	1800	730	124/128	
7.50-16	16	18	6.00G	215	816	1320	1500	730	118/122	
7.00-16	14	17	5.50F	200	785	1180	1320	730	114/118	
6.50-16	12	18	5.5	185	761	925	1060	630	105/110	
6.50-15	10	18	4.50E	180	742	825	950	530	101/106	
6.00-15	10	13	4.50H	170	717	730	825	530	97/101	
6.00-14	10	13	4.50J	170	691	710	800	530	96/100	
6.00-13	8	13	4.50B	170	666	580	650	420	89/93	

K2009 MINING KING TRUCK TIRE

超大花纹矿山王轮胎

Mining King adopt special formula design, deep tread pattern, big block. Has abrasion, cut-resistance, bomb-resistance, rockfall resistance, little resistance, and energy conservation performance, etc.. Specially for mining area, quarry, construction sites and other hard work condition zones.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg)		Pressure (kpa)	Load Index	Code
						Dual	Single			
12.00-20	20	32	8.5	315	1145	3450	4000	810/880	151/156	K2009
11.00-20	18	30	8.0	293	1105	3150	3650	840/910	148/153	
8.25-16	16	22	6.50H	235	867	1600	1800	730	124/128	
7.50-16	16	22	6.00G	215	815	1320	1500	730	118/122	
7.00-16	14	21	5.50F	200	785	1180	1320	730	114/118	

H2009 MINING KING & INDUSTRIAL TIRE

工矿用轮胎

For dump trucks on mining and logging service with super cutting resistance.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg)		Pressure (kpa)	Load Index	Code
						Dual	Single			
12.00-20	20	22	8.5	315	1145	3450	4000	810/800	151/156	H2009
11.00-20	18	22	8.0	293	1105	3150	3650	840/910	148/153	

H2011 (SQ1) MINING STAR TRUCK TYRE

矿山之星系列轮胎

Deep directional design for excellent pulling power in forward and reverse direction. Heat resistance and abrasion resistance tread. Strong casing and higher load capacity



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg)		Pressure (kpa)		Type	Code
						@ 10km/h	@ 50km/h	@ 10km/h	@ 50km/h		
13.00-25	22	26	10.00/1.5	350	1350	8000	4250	825	550	TT	H2011 SQ-1
	28					8900	5010	950	740		


Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg)		Pressure (kpa)	Type	Code
						Dual	Single			
12.00-24	20	27	8.5	315	1250	4000	4500	810/880	TT	H2011 SQ-1
12.00-20	20	26	8.5	315	1145	3450	4000	810/880		
11.00-20	18	25	8.0	295	1105	3150	3650	840/910		
10.00-20	18	25	7.5	282	1073	2900	3350	840/910		
9.00-20	16	21	7.0	268	1043	2500	2900	810/880		
8.25-16	16	18	6.50H	235	865	1600	1800	730		
7.50-16	16	18	6.00G	215	830	1320	1500	730		

- ☆
- ☆
- ☆
- ☆
- ☆



INDIAN PATTERNS TYRE

印度花纹轮胎



<http://www.honghuatyre.com>



H139 SUPER RIB INDIAN PATTERN TIRE

超级水花系列印度(标准)花纹轮胎

Super heavy duty with special compound and strong carcass structure. Provides long mileage, powerful traction and great resistance to cut and chip.

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg)		Pressure (kpa)		Code
						Dual	Single	Dual	Single	
★ 11.00-20	18	18.5	8.0	293	1105	3150	3650	840	910	H139
10.00-20	18	18	7.5	285	1085	2900	3350	840	910	
9.00-20	16	18	7.0	265	1045	2500	2900	810	880	
8.25-20	16	16	6.5	235	980	2180	2430	840	910	
7.50-16	16	15	6.00G	215	823	1320	1500	730	730	
7.00-16	14	13	5.50F	200	785	1189	1320	730	730	

H225 MIX LUG INDIAN PATTERN TIRE

混合羊角系列印度(标准)花纹轮胎

Super heavy duty with special compound. Strong extra deep tread ensure powerful traction and give economic efficiency.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg)		Pressure (kpa)		Code
						Dual	Single	Dual	Single	
★ 11.00-20	18	22.5	8.0	293	1105	3150	3650	840	910	H225
10.00-20	18	22.5	7.5	283	1080	2900	3350	840	910	
9.00-20	16	22	7.0	268	1045	2500	2900	810	880	
7.50-16	16	18	6.00G	215	825	1320	1500	730	730	
7.00-16	14	15	5.50F	202	785	1180	1320	730	730	



H322 MIX RIB (S-LUG) INDIAN PATTERN TIRE

混合水花(半羊角)花纹系列印度(标准)花纹轮胎

Long mileage special with special tread compound and carcass structure. Ensure long mileage with low heat generation and long lasting hard tread.

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg)		Pressure (kpa)		Code
						Dual	Single	Dual	Single	
★ 12.00-24	20	22.5	8.5	315	1245	4000	4500	810	880	H322
11.00-20	18	22.5	8.0	293	1105	3150	3650	840	910	
10.00-20	18	22.5	7.5	283	1080	2900	3350	840	910	
8.25-20	16	20	6.5	236	992	2180	2430	840	910	
8.25-16	16	19	6.50H	235	867	1600	1800	730	730	
7.50-16	16	18	6.00G	215	825	1320	1500	730	730	


K2018 SUPER LUG INDIAN PATTERN TIRE

超级羊角系列印度(标准)花纹轮胎

Pattern type with wide groove. provides outstanding driving comfort on both unpaved roads and muddy roads.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg)		Pressure (kpa)		Code
						Dual	Single	Dual	Single	
★ 11.00-20	18	22.5	8.0	293	1105	3150	3650	840	910	K2018
10.00-20	18	22.5	7.5	283	1080	2900	3350	840	910	
7.50-16	16	22	6.00G	215	816	1320	1500	730	730	
7.00-16	14	21	5.50F	200	785	1180	1320	730	730	
6.50-16	12	18	5.50F	185	761	925	1060	630	630	
6.00-15	10	17.5	4.50E	170	717	825	730	530	630	
6.00-14	10	17	4.50J	170	691	710	800	530	530	
6.00-13	8	15	4.50B	170	666	580	650	420	420	

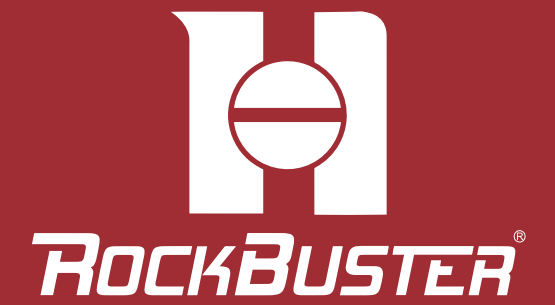

TRUCK TYRE

卡车轮胎



<http://www.honghuatyre.com>

H881 STD TRAILER TIRE STD 拖车轮胎

Strong manipulation.
Tread design provides great traction, good handing stability and low resistance.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (lbs)	Pressure (psi)	Type	Code
ST175/80D13	6	6	5.0	177	610	1360	50	TL	H881 STD
★ ST185/80D13	6	6	5.0	184	626	1480	50		
★ ST185/80D13	8	6	5.0	184	626	1730	65		
★ ST205/75D14	6	6	5.5	203	664	1760	50		
★ ST215/75D14	6	6	5.5	210	678	1870	50		
★ ST205/75D15	6	6	5.5	200	689	1820	50		
★ ST225/75D15	8	6	6.0	210	719	2540	65		

H889-1 M/H MOBILE HOME TIRE 移动房屋拖车胎

Using the latest super wear-resistant formula.
Good puncture-resistance.
High lateral skid prevention capability and longer life.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (lbs)	Pressure (psi)	Type	Code
8-14.5	14	6.5	6.0	196	672	3100	115	TL	H889-1 M/H
8-14.5				203	708				
★ 215/60D14.5	14	7	6.0	203	618	3100	110		
★ 235/60D14.5	14	9	7.0	224	673	3500	110		

H889-2 USA MARKET TRAILER TIRE 北美拖车轮胎

Using the latest super wear-resistant formula.
Excellent anti-irregular wear performance and high mileage.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (lbs)	Pressure (psi)	Type	Code
7.50-16	10	6.5	6.00G	215	805	2755	75	TL	H889-2
	12					3085	90		
7.00-15	8	6.5	5.50F	200	750	1985	60		
	10					2270	75		
ST225/90D16	10	6.5	6.00G	215	805	2755	75		
	12					3085	90		
ST205/90D15	8	6.5	5.50F	200	750	1985	60		
	10					2270	75		

H889/H889* TRAILER TIRE FOR PORT 港口码头集装箱拖车轮胎

Using the latest super wear-resistant formula.
Excellent anti-irregular wear performance and high mileage.



H889

H889*

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (lbs)	Pressure (psi)	Type	Code
10.00-20	14	10.5	7.5	278	1055	6170	100	TT	H889
	16					6610	115		
11-22.5	14	10.5	8.25	279	1054	6170	100	TL	H889*
	16					6610	115		

BI 1000 SUPER RIB LIGHT TRUCK TIRE

超级水花轻卡轮胎

Suits for driving on highway and generally paved road.
The unique pattern design and formula design, high quality raw material support.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg)		Pressure (kpa)		Speed Index	Load Index	Code
						Dual	Single	Dual	Single			
7.50-17	10	12	5.00F	212	843	1260	1440	550	620	L	116/121	BI1000
7.50-16	10	10.5	6.00G	210	805	1120	1250	530	530	K	112/116	
7.00-15	10	9.5	5.50F	200	750	925	1030	530	530	K	105/109	

H889 RIB TRUCK TIRE

水花花纹系列卡车轮胎

Developed for trucks and buses. Features heat resistant tread.
Required to travel continuously at high speeds on highways.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg)		Pressure (kpa)		Load Index	Code
						Dual	Single	Dual	Single		
11.00-20	18	16	8.0	293	1085	3150	3650	840	910	148/153	H889 RIB
10.00-20	18	14	7.5	278	1055	2900	3350	810	880	145/150	
9.00-20	16	14	7.5	259	1018	2500	2900			140/145	
9.00-16	16	16	6.50H	255	890	1720	1955	730		129/134	
8.25-16	16	14	6.50H	235	855	1600	1800			124/128	
7.50-16	14	12	6.00G	215	805	1320	1500			118/122	
7.00-16	14	11	5.50F	200	775	1180	1320			114/118	
6.50-16	12	10	5.50F	185	750	925	1060	630		105/110	
7.00-15	12	11	5.50F	200	750	1030	1150			109/113	
6.50-15	10	10	4.50E	180	730	825	950	530		101/106	
6.50-14	10	10	4.50J	180	705	800	900			100/104	
6.00-15	10	11.5	4.50E	170	705	730	825			97/101	
6.00-14	10	11.5	4.50J	170	680	710	800			96/100	
6.00-13	8	11.5	4.50J	170	655	580	650	420		89/93	

H999 LUG TRUCK TIRE

羊角花纹系列卡车轮胎

The most popular lug tread design for all types of vehicles on both paved and unpaved roads.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg)		Pressure (kpa)		Load Index	Code
						Dual	Single	Dual	Single		
12.00-20	20	18	8.5	315	1125	3450	4000	810	880	151/156	H999 LUG
11.00-20	18	16	8.0	293	1085	3150	3650	840	910	148/153	
10.00-20	18	15	7.5	278	1055	2900	3350	810	880	145/150	
9.00-20	16	15	7.5	259	1018	2255	2575			140/145	
8.25-20	16	14	6.5	235	974	2180	2460	840	910	135/139	
7.50-20	14	14	6.0	215	935	1655	1885	740	810	126/130	
7.00-20	14	12	5.5	200	904	1550	1750	770	840	123/127	
9.00-16	16	16	6.50H	255	890	1850	2120	730		129/134	
8.25-16	16	14	6.50H	235	855	1600	1800			124/128	
7.50-16	14	11	6.00G	215	805	1320	1500			118/122	
7.00-16	14	11	5.50F	200	775	1180	1320	630		114/118	
6.50-16	12	10	5.50F	185	750	925	1060			105/110	
7.00-15	12	11	5.50F	200	750	1030	1150	530		109/113	
6.50-15	10	10	4.50E	180	730	825	950			101/106	
6.00-15	10	11.5	4.50E	170	705	730	825			97/101	
6.00-14	10	11.5	4.50J	170	680	710	800			96/100	
6.00-13	8	11.5	4.50J	170	655	580	650	420		89/93	

