


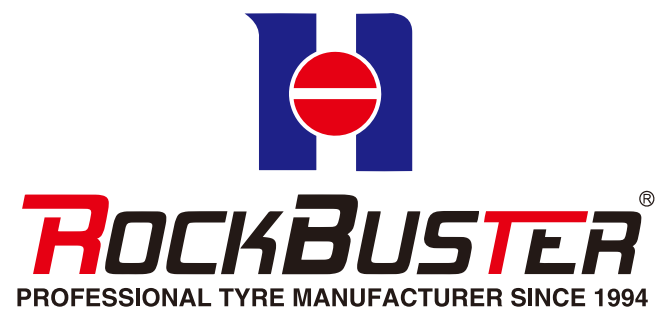

青島市平度宏華橡膠廠

工厂地址：中国山东省青島市平度市崔家集镇小张家村宏華橡膠工业园 266726

国内销售电话：0532-82397777 0532-82395555

国内销售传真：0532-82399999

国外销售电话：0086-532-85822568 85820926 67708486

国外销售传真：0086-532-85820926

工厂网址：www.honghuatyre.com

QINGDAO HONGHUA TYRE FACTORY

Factory Add.: Honghua Rubber Park, Cuijiayi Town of Pingdu, Qingdao China 266726

Exp. Add.: 13Y Jinfu Mansion(B), 22 Shandong Road, Qingdao China 266071

Tel: 0086 532 85822568 85820926 67708486

Fax: 0086 532 85820926

E-mail: Liu@honghuatyre.com

Web: http://www.honghuatyre.com

RockBUSTER®

PROFESSIONAL TYRE MANUFACTURER SINCE 1994



2025-2026 TYRE BROCHURE



青島市平度宏華橡膠廠 QINGDAO HONGHUA TYRE FACTORY



总经理：张永军
GENERAL MANAGER: YONGJUN ZHANG

COMPANY INTRODUCTION

Established in May 1994, **Qingdao Honghua Tyre Factory** is located in the famous touring city of Qingdao. With excellent manufacturing machines and a team of first-class professional technicians, We have developed ourselves into one professional and important OFF-THE-ROAD tyre factory in the world. With over 600 staffs and covering 160,000 square meters, we have reached an annual output value of over \$100 million.

In order to meet the market development, we started the ALL STEEL RADIAL OTR Tyre program in 2023. The total production line (including Extrusion, Calendering, Cutting, Building, Curing, X-Ray Inspection such equipments) is using the advanced technics and high quality compounds in the world. To ensure the tyre quality and factory management, our factory has got ISO9001, ISO14001, ISO45001, CCC, DOT such certificates, and passed Smithers Test & Reach Test. We are the SGS/BV Certificated factory in China also.


Our products range covers Radial OTR Tyre, OTR Tyre, Industrial Tyre, Solid Tyre, Agricultural Tyre, Speciality Tyre and TBB Tyre etc.. With more than 300 sizes and more than 100 patterns in our products, We can satisfy the various demands from the worldwide partners. Every year, we will develop more than 10 new sizes to increase our competitiveness in the market. We also accept OEM orders and private brands orders to meet the continue request of the customers.

Our main brands are ROCKBUSTER and INFIMAX which are already covered more than 100 countries and 160 agents all over the world. We hope our high technology production line and successful marketing experience can catch win-win strategy with you.

After more than **30 years** efforts, **Qingdao Honghua Tyre Factory** is eager to provide good quality products and services for both domestic and international customers. We would like to appreciate your visiting sincerely. **LET'S MOVE THE EARTH TOGETHER!**



FACTORY ENVIRONMENT



MAIN PRODUCTS / 主要产品

05-10 ● **RADIAL OTR TYRE**
全钢子午线工程轮胎

11-26 ● **OTR TYRE**
工程机械轮胎

27-36 ● **SPECIALITY IND TYRE**
特种工业轮胎

37-42 ● **SUPER SOLID TYRE**
实心轮胎

43-45 ● **FORKLIFT TYRE**
叉车轮胎

46-58 ● **AGRICULTURAL TYRE**
农业轮胎

PRODUCT BRANDS / 产品商标

ROCKBUSTER[®]

ROADBUSTER[®] **INFIMAX**[®]

ECOTYRE[®]  **钢铁轮胎**
STEEL TYRES

 **欧美亚**  **JU LI**

CERTIFICATES / 企业认证



SGS

REACH
SVHC



SMITHERS
RAPRA



ROCKBUSTER® INFIMAX®

全钢子午线工程机械轮胎 ALL STEEL RADIAL OTR TYRE



RADIAL OTR TYRE 全钢子午线工程轮胎 >> ROCKBUSTER®

HRE31 E-3/L-3 Radial OTR tyres for the dump-truck/wheel loader/dozer/earthmover etc.



Excellent traction performance, holding force and excellently stable controllability.

Better reinforced design provides more beneficial resistance to puncture, scratch and other properties in the worse working area. Special formula for excellent wear resistance effectively improves the tyre service life.

	Size	Star Rating	T.D. (mm)	S.R.	S.W. (mm)	O. D. (mm)	Max Loading (kg)		Pressure (kpa)		Load Index	Type	Code
							50km/h	10km/h	50km/h	10km/h			
★	17.5R25	★★	28	14.00/1.5	445	1348	5450	8500	525	650	167B/182A2	TT/TL	HRE31 E-3/L-3
	20.5R25	★★	31	17.00/2.0	521	1493	7300	11500	525	650	177B/193A2		
	23.5R25	★★	34	19.50/2.5	597	1617	9250	14500	525	650	185B/201A2		
	26.5R25	★★	38	22.00/3.0	673	1750	11500	18500	525	650	193B/209A2	TL	
	29.5R25	★★	43	25.00/3.5	749	1874	14000	22400	525	650	200B/216A2		
	29.5R29	★★	43	25.00/3.5	749	1975	15000	23600	525	650	202B/218A2	TL	
★	16.00R25 (445/95R25)	★★★	27	11.25/2.0	432	1493	8500	12500	900	1000	182B/196A2	TT	HRE43 E-4/L-4
★	16.00R25 (445/95R25)	★★★	43	11.25/2.0	432	1548	8500	12500	900	1000	182B/196A2	TT/TL	
★	18.00R25 (505/95R25)	★★	47	13.00/2.5	498	1673	9250	16000	650	800	185B/204A2	TL	
	Size	Star Rating	T.D. (mm)	S.R.	S.W. (mm)	O. D. (mm)	Max Loading (kg)		Pressure (kpa)		Load Index	Type	Code
							25km/h		25km/h				
★	18.00R25 (505/95R25)	★★★	47	13.00/2.5	498	1673	21200		1000		214A5	TL	HRE43 E-4/L-4

HRE41

E-4/L-4
Radial OTR tyres for the dump-truck(Articulated & Rigid types)/wheel loader/dozer etc.

Wide and strong tread design and excellent elastic carcass design can provide the excellent traction, stability and controllability safety under a variety of road conditions.

Unique crown and sidewall reinforcement design ensures its resistance to cutting and scratching.

E-4 deep tread ensure higher mileage.



Size	Star Rating	T.D. (mm)	S.R.	S.W. (mm)	O. D. (mm)	Max Loading (kg)		Pressure (kpa)		Load Index	Type	Code
						50km/h	10km/h	50km/h	10km/h			
23.5R25	★★	47	19.50/2.5	597	1617	9250	14500	525	650	185B/201A2	TL	HRE41 E-4/L-4
26.5R25	★★	54	22.00/3.0	673	1750	11500	18500	525	650	193B/209A2		
29.5R25	★★	58	25.00/3.5	749	1874	14000	22400	525	650	200B/216A2		

HRE21

E-2
Radial OTR tyres for the mobile crane/ grader etc.

Excellent abrasio resistance performce with optimized footprint and special compound.

Good heat-resistance and high speed service.

Self-cleaning tread design provieds good handling performance.



Size	Star Rating	T.D. (mm)	S.R.	S.W. (mm)	O. D. (mm)	Max Loading (kg)		Pressure (kpa)		Load Index	Type	Code
						70km/h	80km/h	70km/h	80km/h			
14.00R24 (385/95R24)	★★★	23	10.00W	375	1368	6000	6000	900	900	170E/170F	TL	HRE21 E-2
14.00R25 (385/95R25)	★★★	23	10.00/1.5	375	1368	6000	6000	900	900	170E/170F		
14.00R25 (385/95R25)	★★★	23	10.00/2.0	375	1368	6000	6000	900	900	170E/170F		
16.00R25 (445/95R25)	★★★	23	11.25/2.0	432	1493	7300	6700	900	900	177E/174F		
18.00R25 (505/95R25)	★★★	30	13.00/2.5	498	1615	9500		900		186E		
20.5R25 (525/80R25)	★★★	30	17.00/2.0	525	1475		7300		900	177F		

HRE32 / HRE42

E-3/L-4
Radial OTR tyres for the mining dump truck etc.

Thick and strong and extra wide pattern designing makes tire stronger grip under mining condition.

With excellent traction performance and optimum carrying capacity.

Special designed stone rejector at shoulder and thickened sidewall designing.

E-4 deep tread ensure higher mileage.



Size	Star Rating	T.D. (mm)	S.R.	S.W. (mm)	O. D. (mm)	Max Loading (kg)		Pressure (kpa)		Load Index	Type	Code
						50km/h	10km/h	50km/h	10km/h			
14.00R25 (385/95R25)	★★★	26	10.00/2.0	375	1368	6050	10000	800	1000	170B/188A2	TT	HRE32 E-3
16.00R25 (445/95R25)	★★★	27	11.25/2.0	3432	1493	8500	12500	900	1000	182B/196A2	TT	
Size	Star Rating	T.D. (mm)	S.R.	S.W. (mm)	O. D. (mm)	Max Loading (kg)		Pressure (kpa)		Load Index	Type	Code
						50km/h	10km/h	50km/h	10km/h			
14.00R25 (385/95R25)	★★★	40	10.00/2.0	375	1368	6050	10000	800	1000	170B/188A2	TT	HRE42 E-4
16.00R25 (445/95R25)	★★★	43	11.25/2.0	432	1548	8500	12500	900	1000	182B/196A2	TT/TL	

HRL52

L-5
Radial OTR tyres for the loader/dozer etc.

Excellent performance in rocky surface such as mines & quarries.

Excellent Stability and handling performance.

High mileage by extra deep tread and correct tread compound, reinforced carcass.



Size	Star Rating	T.D. (mm)	S.R.	S.W. (mm)	O. D. (mm)	Max Loading (kg)	Pressure (kpa)	Load Index	Type	Code
						10km/h	10km/h			
17.5R25	★★	64	14.00/1.5	440	1400	8500	650	182A2	TL	HRL52 L-5
20.5R25	★★	68	17.00/2.0	525	1530	11500	650	193A2		
23.5R25	★★	76	19.50/2.5	605	1650	14500	650	201A2		
26.5R25	★★	85	22.00/3.0	675	1775	18500	650	209A2		
29.5R25	★★	95	25.00/3.5	750	1880	22400	650	216A2		
29.5R29	★★	95	25.00/3.5	750	2000	23600	650	218A2		

HRE22

E-2

Radial OTR tyres for the mobile crane/grader etc.

Good heat-resistance compound supports long laugh service with high speed.

Good traction on all surfaces.

Superior comfortable ride.



	Size	Star Rating	T.D. (mm)	S.R.	S.W. (mm)	O. D. (mm)	Max Loading (kg)		Pressure (kpa)		Load Index	Type	Code
							70km/h	80km/h	70km/h	80km/h			
★	14.00R24 (385/95R24)	★★★	23	10.00W	375	1368	6000	6000	900	900	170E/170F	TL	HRE22 E-2
★	14.00R25 (385/95R25)	★★★	23	10.00/1.5	375	1368	6000	6000	900	900	170E/170F		
★	14.00R25 (385/95R25)	★★★	23	10.00/2.0	375	1368	6000	6000	900	900	170E/170F		
★	16.00R25 (445/95R25)	★★★	23	11.25/2.0	432	1493	7300	6700	900	900	177E/174F		
★	18.00R25 (505/95R25)	★★★	30	13.00/2.5	498	1615	9500		900		186E		
★	20.5R25 (525/80R25)	★★★	30	17.00/2.0	525	1475		7300		900	177F		

HRL51

L-5

Radial OTR tyres for the loader/dozer etc.

Excellent grip and traction performance.

Excellent Stability and handling performance.

Excellent operation performance in worse road condition.

High mileage by extra deep tread and correct tread compound, reinforced carcass.



	Size	Star Rating	T.D. (mm)	S.R.	S.W. (mm)	O. D. (mm)	Max Loading (kg)		Pressure (kpa)		Load Index	Type	Code
							10km/h		10km/h				
★	17.5R25	★★	64	14.00/1.5	440	1400	8500		650		182A2	TL	HRL51 L-5
★	20.5R25	★★	68	17.00/2.0	525	1530	11500		650		193A2		
★	23.5R25	★★	76	19.50/2.5	605	1650	14500		650		201A2		
★	26.5R25	★★	85	22.00/3.0	675	1775	18500		650		209A2		
★	29.5R25	★★	95	25.00/3.5	750	1880	22400		650		216A2		
★	29.5R29	★★	95	25.00/3.5	750	2000	23600		650		218A2		

LOAD INDEX

LI	Maximum load		LI	Maximum load		LI	Maximum load		LI	Maximum load		LI	Maximum load	
	kg	lb		kg	lb		kg	lb		kg	lb		kg	lb
120	1400	3090	150	3350	7390	180	8000	17640	210	19000	41890	240	45000	99210
121	1450	3200	151	3450	7610	181	8250	18190	211	19500	43000	241	46250	101960
122	1500	3310	152	3550	7830	182	8500	18740	212	20000	44100	242	47500	104720
123	1550	3420	153	3650	8050	183	8750	19290	213	20600	45420	243	48750	107470
124	1600	3530	154	3750	8270	184	9000	19840	214	21200	46750	244	50000	110250
125	1650	3640	155	3875	8540	185	9250	20390	215	21800	48070	245	51500	113540
126	1700	3750	156	4000	8820	186	9500	20940	216	22400	49390	246	53000	117950
127	1750	3860	157	4125	9090	187	9750	21500	217	23000	50700	247	54500	120150
128	1800	3970	158	4250	9370	188	10000	22050	218	23600	52040	248	56000	123480
129	1850	4080	159	4375	9650	189	10300	22710	219	24300	53580	249	58000	127890
130	1900	4190	160	4500	9920	190	10600	23370	220	25000	55120	250	60000	132300
131	1950	4300	161	4625	10200	191	10900	24030	221	25750	56780	251	61500	135580
132	2000	4410	162	4750	10470	192	11200	24690	222	26500	58430	252	63000	138890
133	2060	4540	163	4875	10750	193	11500	25360	223	27250	60070	253	65000	143300
134	2120	4670	164	5000	11020	194	11800	26020	224	28000	61740	254	67000	147710
135	2180	4810	165	5150	11350	195	12150	26790	225	29000	63940	255	69000	152120
136	2240	4940	166	5300	11690	196	12500	27560	226	30000	66150	256	71000	156530
137	2300	5070	167	5450	12020	197	12850	28330	227	30750	67790	257	73000	160930
138	2360	5200	168	5600	12350	198	13200	29100	228	31500	69460	258	75000	165340
139	2430	5360	169	5800	12790	199	13600	29990	229	32500	71660	259	77500	170660
140	2500	5510	170	6000	13230	200	14000	30870	230	33500	73870	260	80000	176400
141	2575	5680	171	6150	13560	201	14500	31970	231	34500	76070	261	82500	181880
142	2650	5840	172	6300	13890	202	15000	33070	232	35500	78280	262	85000	187390
143	2725	6010	173	6500	14330	203	15500	34180	233	36500	80480	263	87500	192900
144	2800	6170	174	6700	14770	204	16000	35280	234	37500	82690	264	90000	198450
145	2900	6390	175	6900	15210	205	16500	36380	235	38500	85430	265	92500	203920
146	3000	6610	176	7100	15650	206	17000	37480	236	40000	88200	266	95000	209440
147	3075	6780	177	7300	16090	207	17500	38590	237	41250	90940	267	97500	214950
148	3150	6950	178	7500	16530	208	18000	39690	238	42500	93710	268	100000	220500
149	3250	7170	179	7750	17090	209	18500	40790	239	43750	96470	269	103000	227370

SPEED INDEX

Symbol	A2	A3	A4	A5	A6	A8	B	C	D	E	F	G
speed(km/h)	10	15	20	25	30	40	50	60	65	70	80	90
speed(mph)	6	9	12	15	19	25	31	37	40	43	50	56



OTR TYRE 工程机械轮胎



H108A E-3/L-3 GENERAL BLOCK (S TREAD) 普通花纹块工程机械轮胎

Specially desinged for cut and heat resistant compound.
Regular type of tread pattern suitable for hard rock surface and haulage service.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg)		Pressure (kpa)		Type	Code
						50km/h	10km/h	50km/h	10km/h		
14.00-24	16	25	10.0	375	1370	4000	7300	375	550	TT/TL	H108A E-3 L-3
	20					4625	8500	475	700		
	24					5150	9500	575	850		
	28					5600	10000	650	925		
	32					/	10500	/	1000		
16.00-24	20	28	11.25/2.0	430	1495	5450	9750	400	550		
	24					6000	10600	475	650		
	28					6700	11500	575	750		
	32					7300	12500	650	875		
16.00-25	36	36	11.25/2.0	430	1495	7750	13600	725	975		
18.00-25	28	36	13.00/2.5	500	1615	8000	13600	500	650		
	32					8750	15000	575	750		
	36					9250	16000	625	850		
	40					9750	17000	700	950		
15.5-25	12	24.5	12.00/1.3	395	1275	3250	5600	250	400		
	16					3850	6750	325	525		
17.5-25	16	28	14.00/1.5	445	1350	4250	7300	300	475		
	20					5000	8250	400	575		
20.5-25	20	30	17.00/2.0	520	1490	6000	9500	325	450		
	24					6700	10300	400	525		
	28					7500	11500	475	625		
23.5-25	20	33	19.50/2.5	595	1615	7300	10900	300	375		
	24					8000	12500	350	475		
	28					8750	13600	400	550		
26.5-25	28	35	22.00/3.0	675	1750	10000	15500	350	475		
	32					11200	17000	425	550		
29.5-25	28	38	25.00/3.5	750	1875	11500	17500	325	425		
	34					12500	19000	375	500		
										TL	

H108AE E-3/L-3 GENERAL BLOCK (ECOTYRE)
普通花纹块工程机械轮胎（经济型）

Specially designed for wheel loader and earthmover working in good road condition.
It is economic type for users.

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg)		Pressure (kpa)		Type	Code
						50km/h	10km/h	50km/h	10km/h		
17.5-25	16	26.5	14.00/1.5	445	1350	4250	7300	300	475	TT/TL	H108AE E-3 L-3
	20					5000	8250	400	575		
20.5-25	20	28	17.00/2.0	520	1490	6000	9500	325	450		
	24					6700	10300	400	525		
23.5-25	20	30	19.50/2.5	595	1615	7300	10900	300	375		
	24					8000	12500	350	475		



H108AEW E-3/L-3 GENERAL BLOCK (ECOWIDE)
普通花纹块工程机械轮胎（加强经济型）

Specially designed for wheel loader and earthmover working in good road condition.
It is economic type for users.

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg)		Pressure (kpa)		Type	Code
						50km/h	10km/h	50km/h	10km/h		
17.5-25	16	26.5	14.00/1.5	445	1350	4250	7300	300	475	TT/TL	H108AEW E-3 L-3
	20					5000	8250	400	575		
20.5-25	20	28	17.00/2.0	520	1490	6000	9500	325	450		
	24					6700	10300	400	525		
23.5-25	20	30	19.50/2.5	595	1615	7300	10900	300	375		
	24					8000	12500	350	475		



H108B E-3/L-3 LARGE BLOCK (S TREAD)
大块花纹工程机械轮胎

Optimized pattern design for mining and quarrying operations.
Excellent abrasion.

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg)		Pressure (kpa)		Type	Code
						50km/h	10km/h	50km/h	10km/h		
17.5-25	16	28	14.00/1.5	445	1350	4250	7300	300	475	TT/TL	H108B E-3 L-3
	20					5000	8250	400	575		
23.5-25	20	33	19.50/2.5	595	1615	7300	10900	300	375		
	24					8000	12500	350	475		
	28					8750	13600	400	550		



H108C NEW E-3/L-3 LOADER MASTER(Z TREAD)
Z型块状工程机械轮胎（龙工型）

New Z tread tyre for low intensity application of Loader/Earthmover/Grader.

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg)		Pressure (kpa)		Type	Code
						50km/h	10km/h	50km/h	10km/h		
16.00-25	28	28.5	11.25/2.0	430	1495	6700	11500	575	750	TT/TL	H108C E-3 L-3
	32					7300	12500	650	875		
	36					7750	13600	725	975		
15.5-25	12	24.5	12.00/1.3	395	1275	3250	5600	250	400		
	16					3850	6750	325	525		
17.5-25	16	28	14.00/1.5	445	1350	4250	7300	300	475		
	20					5000	8250	400	575		
20.5-25	20	30	17.00/2.0	520	1490	6000	9500	325	450		
	24					6700	10300	400	525		
	28					7500	11500	475	625		
23.5-25	20	33	19.50/2.5	595	1615	7300	10900	300	375		
	24					8000	12500	350	475		
	28					8750	13600	400	550		
26.5-25	28	35	22.00/3.0	675	1750	10000	15500	350	475	TL	
	32					11200	17000	425	550		
29.5-25	28	38	25.00/3.5	750	1875	11500	17500	325	425		
	34					12500	19000	375	500		



H108CE NEW E-3/L-3 LOADER TYRE Z TREAD (ECOTYRE)
Z型龙工花纹工程机械轮胎 (经济型)

NEW Z tread tyre for wheel loader and earthmover working in good road condition.
It is economic type for users.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg)		Pressure (kpa)		Type	Code
						50km/h	10km/h	50km/h	10km/h		
17.5-25	16	27	14.00/1.5	445	1350	4250	7300	300	475	TT/TL	H108CE E-3 L-3
	20					5000	8250	400	575		
20.5-25	20	28	17.00/2.0	520	1490	6000	9500	325	450		
	24					6700	10300	400	525		
23.5-25	20	30	19.50/2.5	595	1615	7300	10900	300	375		
	24					8000	12500	350	475		

H108CEW NEW E-3/L-3 LOADER TYRE Z TREAD (ECOWIDE)
Z型龙工花纹工程机械轮胎 (加强经济型)

NEW Z tread tyre for wheel loader and earthmover working in good road condition.
It is economic type for users.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg)		Pressure (kpa)		Type	Code
						50km/h	10km/h	50km/h	10km/h		
17.5-25	16	27	14.00/1.5	445	1350	4250	7300	300	475	TT/TL	H108CEW E-3 L-3
	20					5000	8250	400	575		
20.5-25	20	28	17.00/2.0	520	1490	6000	9500	325	450		
	24					6700	10300	400	525		
23.5-25	20	30	19.50/2.5	595	1615	7300	10900	300	375		
	24					8000	12500	350	475		

H108D E-3/L-3 SNOW STAR SPECIAL (ANTI-SKIDDING)
冰雪类似路面专用工程机械轮胎 (防滑专用)

Suitable for snow & ice and similar road condition where need good anti-skidding ability.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg)		Pressure (kpa)		Type	Code
						50km/h	10km/h	50km/h	10km/h		
17.5-25	16	28	14.00/1.5	445	1350	4250	7300	300	475	TT/TL	H108D E-3/L-3
	20					5000	8250	400	575		

H108E E-3/L-3 PREMIUM DESIGN OTR TYRE
高档设计工程机械轮胎

Block non-directional pattern design,
Excellent holding and traction performance
With good controllability.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg)		Pressure (kpa)		Type	Code
						50km/h	10km/h	50km/h	10km/h		
23.5-25	20	35	19.50/2.5	595	1615	7300	10900	300	375	TT/TL	H108E E-3 L-3
	24					8000	12500	350	475		
	28					8750	13600	400	550		

H108F E-3/L-3 PREMIUM DESIGN OTR TYRE
高档设计工程机械轮胎

With excellent controllability,
With excellent resistance to puncture, cutting and wear.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg)		Pressure (kpa)		Type	Code
						50km/h	10km/h	50km/h	10km/h		
23.5-25	20	35	19.50/2.5	595	1615	7300	10900	300	375	TT/TL	H108F E-3 L-3
	24					8000	12500	350	475		
	28					8750	13600	400	550		

H108G E-3/L-3 PREMIUM DESIGN OTR TYRE
高档设计工程机械轮胎（甲花纹）

Big size, outstanding casing, higher compound for longer lifespan.
Regular type of tread pattern suitable for hard rock surface and haulage.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg)		Pressure (kpa)		Type	Code
						50km/h	10km/h	50km/h	10km/h		
23.5-25	20	35	19.50/2.5	595	1615	7300	10900	300	375	TT/TL	H108G
	24					8000	12500	350	475		E-3
	28					8750	13600	400	550		L-3

H108H E-3/L-3 GENERAL BLOCK (S TREAD)
普通花纹块工程机械轮胎（乙花纹）

Specially desinged for cut and heat resistant compound.
Regular type of tread pattern suitable for hard rock surface and haulage service.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg)		Pressure (kpa)		Type	Code
						50km/h	10km/h	50km/h	10km/h		
17.5-25	16	28	14.00/1.5	445	1350	4250	7300	300	475	TT/TL	H108H E-3 L-3
	20					5000	8250	400	575		
20.5-25	20	30	17.00/2.0	520	1490	6000	9500	325	450		
	24					6700	10300	400	525		
	28					7500	11500	475	625		
23.5-25	20	33	19.50/2.5	595	1615	7300	10900	300	375		
	24					8000	12500	350	475		
	28					8750	13600	400	550		
26.5-25	28	35	22.00/3.0	675	1750	10000	15500	350	475	TL	
	32					11200	17000	425	550		
29.5-25	28	38	25.00/3.5	750	1875	11500	17500	325	425		
	34					12500	19000	375	500		

H109 IND-3S SUPER EXTRA SLICK
工矿用光面平花工程机械轮胎

Suitable for loader and dozer.
Special compound and smooth pattern design is suitable for heat and cut resistant.
Smooth tread with a reinforced sidewall protector for hard working area .



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg) @10km/h	Pressure (kpa) @10km/h	Type	Code
17.5-25	16	30	14.00/1.5	445	1350	7300	475	TT/TL	H109 IND-3S
	20					8250	575		
23.5-25	20	36	19.50/2.5	595	1615	10900	375		
	24					12500	475		
	28					13600	550		

H164 霸王花 L-4+ DEEP TREAD (MINING SERVICE)
加深花纹工程机械轮胎

The open pattern design provides good holding and traction performance, and are more suitable for poor road conditions.
Interlaced block design and square shoulder design facilitate operational continuity and stability.
The enhanced carcass design, deepened pattern and low-heat tread formula effectively improve the comprehensive service life of the tire.



	Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg) @10km/h	Pressure (kpa) @10km/h	Type	Code
	17.5-25	20	45.5	14.00/1.5	445	1400	8250	575	TT/TL	H164 L-4+
		24					8950	650		
★	20.5-25	24	51.5	17.00/2.0	520	1560	10300	525		
		28					11500	625		
	23.5-25	24	55	19.50/2.5	595	1675	12500	475		
		28					13600	550		
		32					14600	625		
★	26.5-25	28	54	22.00/3.0	675	1800	15500	450	TL	
		32					17000	525		
★	29.5-25	28	57	25.00/3.5	750	1920	17500	425		
		34					20000	525		

H165

魔王 L-4 DEEP TREAD (MINING SERVICE)
加深花纹工程机械轮胎

Suitable for wheel loader with deep tread and cut resistant compound for rocky surface and mining service.
Excellent traction and stability comfortable / Long life tread design



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg) @10km/h	Pressure (kpa) @10km/h	Type	Code
23.5-25	24	55/48	19.50/2.5	595	1675	12500	475	TT/TL	H165 L-4
	28					13600	550		
	32					14600	625		

H166

IND-3/E-3 OUTSTANDING QUALITY MINING & PORT EXTRA
港口、矿山特制工程机械轮胎

Suitable for use in port and mining for long mileage.
Specially designed pattern with extra strong tread and reinforced sidewall protector.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg)		Pressure (kpa)		Type	Code
						50km/h	10km/h	50km/h	10km/h		
16.00-25	28	32	11.25/2.0	430	1550	6700	11500	575	750	TT/TL	H166 IND-3 E-3
	32					7300	12500	650	875		
	36					7750	13600	725	975		
	40					8200	14500	800	1075		
18.00-25	28	36	13.00/2.5	500	1675	8000	13600	500	650	TT/TL	H166 IND-3 E-3
	32					8750	15000	575	750		
	36					9250	16000	625	850		
	40					9750	17000	700	950		

H167

L-5 EXTRA DEEP TREAD (ROCK SERVICE)
超加深花纹工程机械轮胎

Suitable for wheel loader with extra deep tread and cut resistant compound for rocky surface and mining service.
Excellent traction and stability comfortable / Long life tread design.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg) @10km/h	Pressure (kpa) @10km/h	Type	Code
17.5-25	20	63.5	14.00/1.5	445	1400	8250	575	TT/TL	H167 L-5
	24					8950	650		
20.5- 25	24	71	17.00/2.0	520	1560	10300	525		
	28					11500	625		
23.5-25	24	78.5/65	19.50/2.5	595	1675	12500	475		
	28					13600	550		
	32					14600	625		
26.5-25	28	87.5/60	22.00/3.0	675	1800	15500	450	TL	
	32					17000	525		
29.5-25	28	95	25.00/3.5	750	1920	17500	425		
	34					20000	525		

H168 / H168ww

G-2/L-2 SUPER GRADER LOADER SPECIAL
超强平地机和装载机工程机械轮胎

Suitable for wheel loader with extra deep tread and cut resistant compound for rocky surface and mining service.
Excellent traction and stability comfortable / Long life tread design.



H168



H168ww

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg) @ 40km/h	Pressure (kpa) @ 40km/h	Type	Code
13.00-24	12	24	8.00TG	335	1280	2725	300	TT/TL	H168 H168WW G-2 L-2
	16					3200	400		
14.00-24	12	25	8.00TG	360	1350	3450	325	TT/TL	H168 G-2 L-2
	16					3650	375		
16.00-24	16	28.5	10.00VA	470	1460	4500	325	TT/TL	H168 G-2 L-2
★ 15.5-25	12	24.5	12.00/1.3	395	1275	2650	225	TT/TL	H168 H168ECO G-2 L-2
	20					3650	375		
17.5-25	16	26	14.00/1.5	445	1350	3650	325	TT/TL	H168 H168ECO G-2 L-2
	20					3650	325		
20.5-25	16	28.5	17.00/2.0	575	1490	4000	225	TT/TL	H168 G-2 L-2
	20					4500	275		
23.5-25	16	28.5	19.50/2.5	595	1615	4750	200		
	20					5450	250		

H169 E-7 HEATMASTER SAND/DESERT TIRE
耐热大师系列沙漠轮胎

The combination of wide tread, round shoulder and streamlined pattern design provides stable ride, good floating force, excellent steering ability on sand ground road surface.
With HEATMASTER compound for desert application.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg)	Pressure (kpa)	Type	Code
9.00-16	8	10	6.50H	860	245	1320	310	TT/TL	H169 E-7
9.00-17	8	10	7J	880	245	1320	310	TT/TL	
14.00-20	18	10	10.00W	1207	355	4125	245	TT/TL	
16.00-20	16	14	10.00W	1323	419	5450	245		
21.00-25	16	14	15.00/3.0	1699	599	10000	245		
29.5-25	28	21	25.00/3.5	1820	687	10000	240	TL	

★
★

H176 E-2 HEAVY COUNTRY CROSS TIRE
(SUPER MILITARY APP.)
重性越野轮胎（军工适用）

Super country-cross pattern is suitable for heavy trucks and other machines.
Military tech design can support using in terriable conditions such as desert, grass, forest, mountain road etc.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @ 60km/h	Pressure (kpa) @ 60km/h	Type	Code
1500X600-635	14	29	500X635	600	1500	5750	380	TT	H176 E-2
	18					6500	470		
	22					7050	550		
1600X600-685	24	29	500X685	600	1600	7900	440		

H177 C-1 SLICK ROLLER STAR TYRE
光面压路机轮胎

The tread cap is wide and flat with well vibration damping performance and compaction performance.The tread rubber has good oil resistance.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @10km/h	Pressure (kpa) @10km/h	Type	Code
7.50-15	14	18	6.00GS	215	785	2900	875	TT	H177 C-1
7.50-16	14	18	6.00GS	215	810	3075	925		
9.00-20	16	20	7.0	255	1015	4750	825		
11.00-20	16	22	8.0	290	1080	5450	725		
	18					5800	825		
	24					6700	1025		
12.00-20	16	26	8.5	316	1120	5800	650		
	24					7570	1028		
13/80-20	16	20	8.5	310	1060	5430	800		
14/70-20	12	22	11.00TG	356	952	4005	450		
	14					4270	500		
	20					5450	760		
23.1-26	12	22	DW20	595	1500	5150	200	TT/TL	
	14					5600	230		
Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @30km/h	Pressure (kpa) @30km/h	Type	Code
23.1-26	12	22	DW20	595	1500	3655	170	TT/TL	H177 C-1
	14					4050	200		

★

★

★

★

H178 R-3/C-2/E-7 MULTI-PURPOSE FLOATION TIRE
多用途浮力型轮胎（压路机及沙漠车辆用胎）

Wide Section for good flotation force and steering ability.
Special for desert transportation and road compactor application.



Size	PR	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @10km/h	Pressure (kpa) @10km/h	Type	Code
18.4-26	12	DW16	467	1430	4180	260	TT/TL	H178 R-3 C-2 E-7
23.1-26	12	DW20	595	1500	5150	200		
	14				5600	230		
	16				6150	260		

★

H179

IND-4/E-4 PORT & MINING SPECIAL
港口矿山专用轮胎

Deep tread depth for longer lifespan
Wide tread design with wearing resistance.
Thick tyre body with power torque quality.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg)		Pressure (kpa)		Type	Code
						50km/h	10km/h	50km/h	10km/h		
18.00-25	36	64.5	13.00/2.5	515	1694	9250	16000	625	850	TL	H179 IND-4 E-4
	40					9750	17000	700	950		
	44					10300	18000	775	1050		

H180

IND-4S/L-4S PORT & MINING SPECIAL
港口矿山专用轮胎

H181

L-5S UNDERGROUND MINING SPECIAL
地下矿井以及超恶劣环境专用轮胎

Deep tread depth for longer lifespan
Wide tread design with wearing resistance.
Thick tyre body with power torque quality.



	Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg)		Pressure (kpa)		Type	Code
							50km/h	10km/h	50km/h	10km/h		
★	18.00-25	32	58	13.00/2.5	500	1675	8750	15000	575	750	TL	H180 IND-4S L-4S
		36					9250	16000	625	850		
		40					9750	17000	700	950		
		44					10300	18000	775	1050		
★	18.00-25	32	85	13.00/2.5	500	1675	8750	15000	575	750	TL	H181 L-5S
		36					9250	16000	625	850		
		40					9750	17000	700	950		
		44					10300	18000	775	1050		

DT1000

E-4 PORT INDUSTRIAL USE SPECIAL
港口工业专用轮胎

Developed for heavy use on forklifts and other industrial vehicles.
With its wide and extra deep tread provides stronger traction, longer life
and puncture resistance.



	Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @10km/h	Pressure (kpa)	Type	Code
★	10.00-20	18	40	7.5	300	1097	5470	890	TT/TL	DT1000 E-4
★	12.00-20	24	45	8.5	340	1173	9800	1000		
	12.00-24	24	54	8.5	333	1300	10250	1000		
	14.00-24	28	57	10	386	1417	10000	925		
		32					14700	1100		
	14.00-25	28	57	10	386	1417	10000	925		
		32					14700	1100		
★	16.00-25	36	62	11.25/2.0	432	1548	14500	1075	TL	
		40					13600	975		
★	18.00-25	40	69	13.00/2.5	526	1673	17000	950		
		44					18000	1050		

宏华轮胎 中国小型装载机轮胎市场潮流引导者

标准装载机轮胎花纹设计 适合大多数普通作业环境 是性价比极高的小装轮胎.

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @ 10km/h	Pressure (kpa) @ 10km/h	Type	Code	NOTE
16/70-24	14	20	13(SDC)	410	1175	5600	450	TT	H108	普通 E3/L3
16/70-20	14	30	13(SDC)	410	1175	5150	450	TT	H108	加深高档 E3/L3
	18					5800	450			
16/70-20	14	20	13(SDC)	410	1175	5150	450	TT	H108	普通 E3/L3
	18					5800	450			
20.5/70-16	14	22	10.00G	335	910	1600	280	TT	E3/L3	加深高档 E3/L3
16/70-16										
20.5/70-16	14	14	10.00G	320	870	1600	280	TT	E3/L3	中断面 E3/L3
16/70-16										
20.5/70-16	14	14	10.00G	310	850	1600	280	TT	E3/L3	小断面 E3/L3
16/70-16										
14/90-16	10	16	7.0N	270	882	1530	350	TT	H108	普通 E3/L3
12.00-16	12	17	6.50H	255	890	1600	420	TT	H108	普通 E3/L3
8.25-16	8	16	6.5	235	865	1530	300	TT	H108	普通 E3/L3
7.50-16	8	16	5.5	215	815	750	150	TT	H108	普通 E3/L3



标准装载机轮胎花纹设计 适合大多数普通作业环境 是性价比极高的小装轮胎.

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @ 10km/h	Pressure (kpa) @ 10km/h	Type	Code	NOTE
16/70-24	14	22	13(SDC)	410	1175	5600	450	TT	E3L3	市场新模具 E3/L3
16/70-20	14	22	13(SDC)	410	1050	5150	450			
	18					5800	550			
16/60-20	14	20	13(SDC)	410	1100	5150	450			
20.5/70-16	14	14	10.00G	335	910	1600	280			
16/70-16										



标准装载机轮胎花纹设计 适合大多数普通作业环境 是性价比极高的小装轮胎.

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @ 10km/h	Pressure (kpa) @ 10km/h	Type	Code	NOTE
20.5/70-16	14	17	10.00G	335	910	1600	280	TT	E3/L3	中档颗粒胎面 E3/L3
16/70-16										



宏华轮胎 中国小型装载机轮胎市场潮流引导者

标准装载机轮胎花纹设计 适合大多数普通作业环境 是性价比极高的小装轮胎.

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @ 10km/h	Pressure (kpa) @ 10km/h	Type	Code	NOTE
20.5/70-16	14	22	10.00G	335	910	1600	280	TT	H908	加深龙工 E3/L3
16/70-16										
20.5/70-16	14	14	10.00G	335	910	1600	280	TT	H908	普通龙工 E3/L3
16/70-16										
20.5/70-16	14	14	10.00G	335	830	1600	280	TT	H908	小模具龙工 E3/L3
16/70-16										



人字花纹设计,让替换轮胎更具有经济价值, 自洁性良好, 适合在路况良好的松散路面使用.

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @ 10km/h	Pressure (kpa) @ 10km/h	Type	Code	NOTE
20.5/70-16	14	25	10.00G	335	910	1600	280	TT	R-1	MPT R-1
16/70-16										



SKS-3B (L-5P) 大块花纹设计提供较好的耐磨和抗暴性能,适合在中等恶劣环境下作业.

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @ 10km/h	Pressure (kpa) @ 10km/h	Type	Code	NOTE
20.5/70-16	14	25	10.00G	335	910	1600	280	TT	L-5P	SKS-3B (L-5P)
16/70-16										

★
★



标准L-5 加深花纹设计, 沟槽更深, 胎面更厚. 和普通花纹相比较, 此花纹耐磨更好, 抗暴能力更强, 使用寿命更长. 适合在复杂的恶劣环境下作业.


Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @ 10km/h	Pressure (kpa) @ 10km/h	Type	Code	NOTE
20.5/70-16	16	45	10.00G	335	910	2700	325	TT	L-5	标准 L-5
16/70-16										



超深花纹设计, 加宽加深花纹槽, 良好的自洁性能. 轮胎具有很强的驱动性能, 适合在复杂的泥泞路面使用.

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @ 10km/h	Pressure (kpa) @ 10km/h	Type	Code	NOTE
16/70-24	14	45	13(SDC)	410	1175	5600	450	TT	L-5	半实心 L-5
16/70-20	14	45	13(SDC)	410	1150	5100	450			
	18					5800	550			
20.5/70-16	16	45	10.00G	335	910	2700	325			
16/70-16										



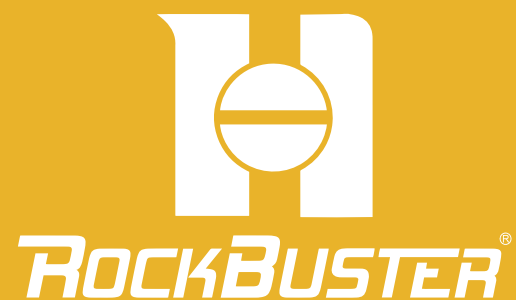

SPECIALITY IND
TYRE
特种工业轮胎



SPECIALITY IND TYRE 特种工业轮胎 **ROCKBUSTER**

AS2000 L-2 URBAN INDUSTRIAL
L-2 城市用挖掘机、工业拖车轮胎

Developed for urban excavator and industrial trailer vehicles, by new compound for outstanding durability.
Extra deep tread provides longer life and puncture resistance. Reinforced tie bar between the zig-zag block pattern.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg)	Pressure (kpa)	Type	Code
9.00-20	16	28	7.0	260	1025	4060	740	TT	AS2000 L-2 NHS

H966 G-2/L-2 EXCAVATOR TYRE(X'C)
G-2/L-2 挖掘机轮胎系列

Optimized pattern design for excavator.
Excellent abrasion and traction and self-cleaning.



H966A H966B

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @ 10km/h	Pressure (kpa) @ 10km/h	Type	Code
8.25-20	14	20	6.5	235	992	3865	830	TT	H966A G-2/L-2
9.00-20	16	22	7.0	259	1038	4725	860		
10.00-20	18	22	7.5	278	1073	5470	890	TT	H966A G-2/L-2
11.00-20	16 18	24	8.0	293	1105	5405 6000	760 825		
9.00-20	16	25	7.0	259	1040	4725	860	TT	H966B G-2

H967 G-2/L-2 EXCAVATOR TYRE (ECO-USE)
G-2/L-2 经济型挖掘机轮胎



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @ 10km/h	Pressure (kpa) @ 10km/h	Type	Code
9.00-20	16	20	7.0	259	1038	4725	860	TT	H967 G-2/L-2
10.00-20	18	20	7.5	278	1073	5470	890		



SKS-1 (R-4)

SKS-1+ (R-4)

TW171 (L-2)

SKS-2 (NEW L-2)

SKS-1/1+/TW171/2

SKID STEER TYRE/INDUSTRIAL TYRE
工业车辆轮胎/特种工业轮胎

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg)	Pressure (kpa)	Type	Code
27X8.5-15	8	13	7JA	215	678	1030	350	TL	SKS-1 R-4
11L-16	12	15	W8L	280	835	1395	420		
10-16.5	10	19	8.25	264	773	2135	520		
	12					2375	620		
12-16.5	12	19	9.75	307	831	2865	550		
	14					3075	620		
14-17.5	14	19	10.5	349	921	3875	550		
15-19.5	14	21	11.75	389	1019	4565	485		
	16					4935	550		
12-16.5	14	22	9.75	307	831	3075	620	TL	SKS-1+ R-4
14-17.5	14	33	10.5	349	921	3875	550	TL	TW171 L-2
12-16.5	14	21	9.75	310	835	3075	620	TL	SKS-2 NEW L-2
12-16.5	14	25	9.75	314	840	3075	620	TL	

- SKS-1 R-4 STANDARD**
Optimized pattern design for loader/grader with excellent traction and self-cleaning in a muddy ground.
- SKS-1+ R-4 ADVANCED**
Optimized pattern design for loader/grader with excellent traction and self-cleaning in a muddy ground.
- TW171 L-2 ADVANCED**
Optimized pattern design for loader/grader with excellent traction and self-cleaning in a muddy ground.
- SKS-2 NEW L-2 PRIMIUM**
For loaders and dozers operations on rock, coal and earth. Separate lugs and tapered for greater traction and self-cleaning. Extra wide tread profile for better land ratio and High floating force.



SKS-3 (L-5)

SKS-4 (R-4+)

SKS-5 (L-4)

SKS-6 (L-4C)

SKS-3/4/5/6

SKID STEER TYRE/INDUSTRIAL TYRE
工业车辆轮胎/特种工业轮胎

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg)	Pressure (kpa)	Type	Code
11L-16	14	22	W8L	280	845	1550	470	TL	SKS-3 L-5
10-16.5	12	35	8.25	270	785	2375	620		
12-16.5	14	42	9.75	314	845	3075	620		
12.5/80-18	16	36	9	308	985	3130	490		
14-17.5	14	30	10.5	349	935	3875	550		
19.5L-24	16	43	DW17L	495	1339	4135	300		
10-16.5	12	27	8.25	270	785	2375	620	TL	SKS-4 R-4+
12-16.5	14	35	9.75	314	845	3075	620		
12.5/80-18	16	30	9	308	985	3130	490	TL	SKS-5 L-4
10-16.5	12	32	8.25	270	785	2375	620		
12-16.5	14	40	9.75	314	845	3075	620		
11L-16	14	19	W8L	280	845	1550	470	TL	SKS-6 L-4C
10-16.5	12	26	8.25	264	773	2375	620		
12-16.5	14	32	9.75	307	831	3075	620		

- SKS-3 L-5 EXTRA DEEP**
Application to Skid Steer loader and scraper tyre for hard working area.
Good wear resistance, with extra deep tread and side-skidding resistance.
- SKS-4 R-4+ ALL TERRAIN**
For loaders and dozers operations on rock, coal and earth.
Extra wide tread profile for better land ratio and High floating force.
- SKS-5/6 L-4/L-4C DEEP**
Application to Skid Steer loader and scraper tyre for hard working area.
Good wear resistance, with extra deep tread and side-skidding resistance

SKS-3B L-5P(R-4X) Big Tread Industrial Tire

L-5P(R-4X) 超大块特种工业用胎

Big tread, Cutting-resistance, Longer lifespan in machine working.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @ 40km/h	Pressure (kpa) @ 40km/h	Type	Code
16.9-24	12	29	W15L	430	1323	3250	260	TL	SKS-3B L-5P
	14					3450	300		
16.9-28	12	29	W15L	430	1423	3550	260		
	14					3875	300		
19.5L-24	12	30	DW17L	495	1328	3450	230		
	14					3750	260		
	16					4135	300		

H655 NEW R-4 IF INDUSTRIAL FLOTATION

NEW R-4 IF 新款工业浮力用胎

Industrial flotation design for better performance in construction area.
High load capacity.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @ 40km/h	Pressure (kpa) @ 40km/h	Type	Code
16.9-24	12	27	W15L	430	1323	3250	260	TL	H655 NEW R-4 IF
	14					3450	300		
16.9-28	12	27	W15L	430	1423	3550	260		
	14					3875	300		
19.5L-24	12	29	DW17L	495	1328	3450	230		
	14					3750	260		
	16					4135	300		

H656 R-4+ A/T INDUSTRIAL TYRE

R-4+ A/T 特种工业轮胎

All terrain tread design for better performance in machine working.
Resistance to cuts, abrasions and high load capacity.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @ 30km/h	Pressure (kpa) @ 30km/h	Type	Code
16.9-24	14	26	W15L	430	1323	3530	300	TL	H656 R-4+
16.9-28	14	26	W15L	430	1423	3765	300		
19.5L-24	16	28	DW17L	495	1328	4135	300		

H658 R-4 INDUSTRIAL TYRE

R-4 特种工业轮胎

Very good traction and better tire life.
Good resistance to tearing and cracking.
Resistance to cuts, abrasions and high load capacity.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @ 40km/h	Pressure (kpa) @ 40km/h	Type	Code
16.9-24	12	27	W15L	430	1323	3250	260	TL	H658 R-4
	14					3450	300		
16.9-28	12	27	W15L	430	1423	3550	260		
	14					3875	300		
18.4-26	12	27	W16L	467	1438	4000	250		
	14					4375	290		
	16					4750	330		
17.5L-24	12	26	DW15L	445	1253	3150	270		
	14					3350	310		
19.5L-24	12	29	DW17L	495	1328	3450	230		
	14					3750	260		
	16					4135	300		
21L-24	12	29	DW18	533	1388	3875	220		
	14					4200	250		
	16					4500	280		

H659

R-4 TRACTION IMPLEMENT/BACKHOE
R-4 特种工业轮胎

Excellent traction and flushing / Good resistance to cracking.
Strengthen and stabilize tread under severe operating condition.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @ 30km/h	Pressure (kpa) @ 30km/h	Type	Code
10.5/80-18	10	22	9	274	905	1935	370	TL	H659 R-4
	12					2150	430		
12.5/80-18	12	26	9	308	985	2625	370		
	14					2910	430		
	16					3130	490		

H660

R-4 INDUSTRIAL TYRE
R-4 特种工业用胎

Very good traction and better tire life.
Good resistance to tearing and cracking.
Resistance to cuts, abrasions and high load capacity.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @ 40km/h	Pressure (kpa) @ 40km/h	Type	Code
19.5L-24	12	27	DW17L	495	1328	3450	230	TL	H660 R-4

H661

F-3 INDUSTRIAL FRONT
F-3 特种工业轮胎

Husky industrial rib design, wide profile for front backhoe loader service.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @ 30km/h	Pressure (kpa) @ 30km/h	Type	Code
11L-15	10	12	W8L	280	810	1190	340	TL	H661 F-3
	12					1355	420		
11L-16	10	12	W8L	280	835	1240	340		
	12					1395	420		

H662

MP MASTER I-1 IMPLEMENT USE
IMP I-1 农机具大师系列轮胎

Low section implement tire. Reduced soil compaction.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @ 30km/h	Pressure (kpa) @ 30km/h	Type	Code
10.0/75-15.3	12	9	9.0	264	760	1700	470	TL	H662 IMP I-1
	14					1900	550		
11.5/80-15.3	12	10	9.0	290	845	2180	410		
	14					2430	470		
	16					2575	540		
12.5/80-15.3	14	10	9.0	307	889	2650	440		
	16					3150	490		

H663

I-1 FARM SPECIALIST IMPLEMENT
I-1 农机具轮胎

Multi rib farm tire designed for flotation for use on farm implement, wagons, tanks, carts and other pull behind vehicles.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @30km/h	Pressure (kpa) @30km/h	Type	Code
9.5L-15	8	8	8LB	240	765	1100	280	TL	H663 I-1
	10					1310	340		
11L-15	8	9	W8L	280	775	1130	220		
	10					1285	280		
	12					1345	340		
12.5L-15	8	9	W10L	317	823	1350	220		
	12					1730	330		
	14					1830	360		
11L-16	8	9	W8L	280	800	1175	220		
	10					1340	280		
	12					1515	340		

H664

MPT R-1 TRACTION STAR (IND & AG)
MPT R-1 强大牵引力工农业用胎

Best for tractor, telehandler, backhoe loader, compactor.
Excellent traction, self-cleaning and cutting resistance



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg)	Pressure (kpa)	Type	Code
15.5/80-24 (400/80-24)	12	35	13.0	394	1262	2900	300	TL	H664 R-1
	16					3350	400		

H665

DEEP R-4 TRACTION STAR
加深 R-4 强大牵引力工农业用胎

Best for tractor, telehandler, backhoe loader, compactor.
Excellent traction, self-cleaning and cutting resistance



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg)	Pressure (kpa)	Type	Code
405/70-20 (16/70-20)	14	37	13.0	407	1076	3250	350	TL	H665 DR-4
405/70-24 (16/70-24)	14	37	13.0	407	1178	3550	350		



SKS-X



SKS-Y



SKS-Z

SKS-X/Y/Z

SKID STEER TYRE
工业车辆轮胎

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg)	Pressure (kpa)	Type	Cod e
33X12-16.5	10	14	9.75	310	840	2540	450	TL	SKS-X Off Road
33X12-16.5	10	14	9.75	310	840	2540	450		SKS-Y Sandtrack
33X12-16.5	10	14	9.75	310	840	2540	450		SKS-Z Turf

H666

R-4 BOOM LIFT TYRE
R-4 高空作业车/登高车轮胎

Good performance for boom lift and other air-work machines.
Stable support with excellent wear resistant.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading (kg)	Pressure (kpa)	Type	Code
315/55D20	12	18	11.00	319	830	3360	560	TL	H666 R-4
355/55D625	14	23	11.75	360	936	3450	520		
15-625	16	25	13.00	385	1018	5580	690		
18-625	16	25	15.00	455	1046	6900	690		
445/50D710	18	25	W15	445	1189	7300	690		
	20					7740	790		


H667

MPT I-3 TRACTION FOR IND & AG USE
MPT I-3 强大牵引力工农业用胎

Best for tractor, telehandler, backhoe loader, compactor.
Excellent traction, self-cleaning and cutting resistance



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @30km/h	Pressure (kpa) @30km/h	Type	Code
10.0/75-15.3	12	20	9.0	264	775	1700	470	TL	MPT I-3
	14					1900	550		
11.5/80-15.3	12	20	9.0	290	869	2180	410		
	14					2430	470		
	16					2575	540		
12.5/80-15.3	14	20	9.0	307	925	2650	440		
	16					3150	490		
Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @40km/h	Pressure (kpa) @40km/h	Type	Code
18-19.5	18	24	14.0	460	1105	5460	725	TL	MPT I-3
405/70-20 (16/70-20)	14	30	13.0	407	1076	3250	350		
405/70-24 (16/70-24)	14	30	13.0	407	1178	3550	350		

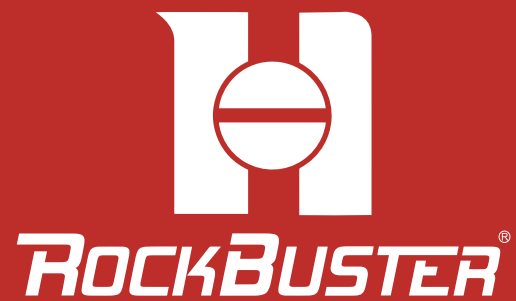

SUPER SOLID TYRE

实心轮胎



SUPER SOLID TYRE 实心轮胎

ROCKBUSTER®



H991A

XTRA WALL AND MASSIVE TREAD BLOCK SOLID
超强充气式轮辋实心轮胎

High quality raw material support and unique formula design.

Size	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading(kg)				Code	
					Forklift					Other Industrial
					10km/h		16km/h			10km/h
					Load	Rota	Load	Rota		
300-15 (315/70-15)	29	8.0	300	838	6895	5305	6300	4845	5310	H991A SOLID



H991B

EXCELLENT VIBRATION CONTROL PATTERN SOLID
港口机车专用充气式轮辋实心轮胎

Aggressive pattern for port trailer and forklift.
High load & excellent wear-resistance.

Size	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading(kg)					Code
					Forklift				Other Industrial	
					10km/h		16km/h		10km/h	
					Load	Rota	Load	Rota		
7.00-15	33	5.5(6.0)	207	759	3700	2845	3375	2595	2845	H991B SOLID
7.50-16	33.5	6.0(5.5)	230	820	4400	3385	4025	3095	3385	
9.00-20	40	6.5	259	1038	6160	5153	5630	4690	4745	
9.00-20		7.0	259	1038	6365	5305	5815	4845	4905	
10.00-20	40	7.5	278	1073	7075	5895	6460	5385	5450	
10.00-20		8.0	278	1073	7300	6085	6670	5560	5630	
11.00-20	45	7.5	300	1095	7470	6225	6820	5685	5750	
11.00-20		8.0	300	1095	7715	6430	7045	5870	5940	
12.00-20	45	8.0	310	1180	8640	7200	7885	6570	6650	
12.00-20		8.5	310	1180	8920	7435	8140	6785	6865	

H992A SUPER STRONG LARGE BLOCK SOLID
大块花纹充气式轮辋实心轮胎

Litter rolling resistance & low heat generating.
Little energy conservation & strong rockfall resistance.
It's the best choice for balanced forklift and other industrial vehicles.



Size	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading(kg)					Code
					Forklift				Other Industrial	
					10km/h		16km/h		10km/h	
					Load	Rota	Load	Rota		
4.00-8	20	3.0	115	408	1090	840	995	765	840	H992A SOLID
5.00-8	24	3.0	146	469	1255	965	1145	880	960	
18X7-8	24	4.33	170	457	2430	1870	2215	1705	1870	
6.00-9	24	4.0	160	545	1975	1520	1805	1390	1520	
6.50-10	28	5.0	178	597	2715	2090	2485	1910	2095	
7.00-9	28	5.0	185	578	2670	2005	2440	1875	2055	
7.00-12	29	5.0	192	683	3105	2390	2835	2180	2390	
8.25-12	38	6.5	236	735	3425	2635	3125	2405	2635	
28X9-15 (8.15-15) (225/75-15)	35	7.0	225	706	4060	3125	3710	2855	3125	
8.25-15	38	6.5	236	847	5085	3910	4640	3570	3910	

- ▲ CLICK/QUICK type solid tyre available
- ▲ 此型号可以提供快装式(林德式)实心轮胎.

H992B EXTRA POWER STRONG INDUSTRIAL SOLID
小块花纹高档充气式轮辋实心轮胎

High quality raw material support and unique formula design.
The tyre enjoys outstanding performance at all aspects.



Size	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading(kg)					Code
					Forklift				Other Industrial	
					10km/h		16km/h		10km/h	
					Load	Rota	Load	Rota		
5.00-8	24	3.0	146	469	1255	965	1145	880	960	H992B SOLID
18X7-8	24	4.33	170	457	2430	1870	2215	1705	1870	
6.00-9	24	4.0	160	545	1975	1520	1805	1390	1520	
6.50-10	28	5.0	178	597	2715	2090	2485	1910	2095	
7.00-9	28	5.0	185	578	2670	2005	2440	1875	2055	
7.00-12	29	5.0	192	683	3105	2390	2835	2180	2390	
8.25-12	38	6.5	236	735	3425	2635	3125	2405	2635	
28X9-15 (8.15-15) (225/75-15)	35	7.0	225	706	4060	3125	3710	2855	3125	
8.25-15	38	6.5	236	847	5085	3910	4640	3570	3910	



H993 PERFECT BALANCE INNOVATIVE TREAD SOLID
均衡型花纹充气式轮辋实心轮胎

High land ratio for longer life.
It's the best choice for balanced forklift and other industrial vehicles.

Size	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading(kg)					Code
					Forklift				Other Industrial	
					10km/h		16km/h		10km/h	
					Load	Rota	Load	Rota		
16X6-8	17	4.33	162	418	1545	1190	1410	1085	1185	H993 SOLID
21X8-9	27	6.0	207	535	2890	2225	2645	2035	2230	
23X9-10	26	6.5	225	595	3730	2870	3405	2620	2865	

H994 KING STAR SOLID 超高档实心轮胎

Best cutting resistance.
Expert low rolling resistance.
Longest lifespan.



	Size	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading(kg)					Code
						Forklift				Other Industrial	
						10km/h		16km/h		10km/h	
						Load	Rota	Load	Rota		
★	5.00-8	24	3.0	146	469	1255	965	1145	880	960	H994 SOLID
	18X7-8	24	4.33	170	457	2430	1870	2215	1705	1870	
	6.00-9	24	4.0	160	545	1975	1520	1805	1390	1520	
★	6.50-10	28	5.0	178	597	2715	2090	2485	1910	2095	
	7.00-9	28	5.0	185	578	2670	2005	2440	1875	2055	
	7.00-12	29	5.0	192	683	3105	2390	2835	2180	2390	
★	8.25-12	38	6.5	236	735	3425	2635	3125	2405	2635	
★	28X9-15 (8.15-15)	35	7.0	225	706	4060	3125	3710	2855	3125	
	(225/75-15)										
★	8.25-15	38	6.5	236	847	5085	3910	4640	3570	3910	
★	16X6-8	17	4.33	162	418	1545	1190	1410	1085	1185	
★	21X8-9	27	6.0	207	535	2890	2225	2645	2035	2230	
★	23X9-10	26	6.5	225	595	3730	2870	3405	2620	2865	
★	9.00-20	40	6.5	259	1038	6160	5135	5630	4690	4745	
★	9.00-20		7.0	259	1038	6365	5305	5815	4845	4905	
★	10.00-20	40	7.5	278	1073	7075	5895	6460	5385	5450	
★	10.00-20		8.0	278	1073	7300	6085	6670	5560	5630	
★	11.00-20	45	7.5	300	1095	7470	6225	6820	5685	5750	
★	11.00-20		8.0	300	1095	7715	6430	7045	5870	5940	
★	12.00-20	45	8.0	310	1180	8640	7200	7885	6570	6650	
★	12.00-20		8.5	310	1180	8920	7435	8140	6785	6865	

H992A NON-MARKING SOLID 无痕环保实心轮胎

Environmental friendly.
Static eletricity free.



Size	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading(kg)					Code
					Forklift				Other Industrial	
					10km/h		16km/h		10km/h	
					Load	Rota	Load	Rota		
4.00-8	20	3.0	115	408	1090	840	995	765	840	H992A SOLID
5.00-8	24	3.0	146	469	1255	965	1145	880	960	
18X7-8	24	4.33	170	457	2430	1870	2215	1705	1870	
6.00-9	24	4.0	160	545	1975	1520	1805	1390	1520	
6.50-10	28	5.0	178	597	2715	2090	2485	1910	2095	
7.00-9	28	5.0	185	578	2670	2005	2440	1875	2055	
7.00-12	29	5.0	192	683	3105	2390	2835	2180	2390	
8.25-12	38	6.5	236	735	3425	2635	3125	2405	2635	
8.25-15	38	6.5	236	847	5085	3910	4640	3570	3910	
28X9-15 (8.15-15) (225/75-15)	35	7.0	225	706	4060	3125	3710	2855	3125	

- NON-MARKING SOLID TIRES OF H991A, H991B, H992B, AND H993 ARE AVAILABLE ALSO.
- 我们也可以生产具有H991A, H991B, H992B, 以及H993花纹的无痕环保实心轮胎。
- OTHER COLORS ARE AVAILABLE TOO.
- 可选其他颜色。

TW993 NON-MARKING SOLID FOR AIRPORT WORKING 机场专用无痕环保浅纹实心轮胎


High quality raw material support and unique formula design.
The tyre enjoys outstanding performance at all aspects.



Size	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading(kg)					Code
					Forklift				Other Industrial	
					10km/h		16km/h		10km/h	
					Load	Rota	Load	Rota		
4.00-8	4	3.75	120	406	1090	840	995	765	840	TW993



FORKLIFT TYRE 叉车轮胎



FORKLIFT TYRE 工业叉车轮胎 **ROCKBUSTER**



H989 INDUSTRIAL MASTER (IND) 常规花纹工业叉车轮胎

Developed for heavy use on forklifts and other industrial vehicles.
With its wide and extra deep tread provides stronger traction, longer life and puncture resistance.

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Max Loading(kg)	Pressure (kpa)	Type	Code
						25km/h Load			
☆ 355/65-15	28	23	9.75	359	846	6000	1000	TT	H989 IND
	32					7500	1300		
300-15	18	21	8.0	300	848	5530	830		
	20					5940	930		
12.00-20	20	29	8.5	315	1135	7400	900		
	24					8250	1000		
10.00-20	18	28	7.5	278	1078	6475	890		
	20					6970	1000		
9.00-20	16	26	7.0	259	1025	5595	860		
8.25-15	14	18	6.5	235	840	3775	830		
	16					4050	925		
28X9-15 (8.15-15) (225/70-15)	14	19	7.0	220	710	3050	970		
	16					3115	1000		
7.50-15	14	21	6.0	215	780	3375	925		
	16					3550	1000		
7.00-15	12	21	5.5	200	750	2870	860		
	14					3140	1000		
8.25-12	12	18	6.5	235	765	3060	720		
7.00-12	12	13	5.00S	190	676	2375	860		
	14					2590	1000		
6.50-10	10	12	5.00F	175	590	1655	790		
	12					1895	1000		
7.00-9	10	13	5.00S	190	590	1995	860		
6.00-9	10	11	4.00F	160	540	1505	860		
	12					1675	1030		
5.00-8	10	11	3.50D	137	470	1150	1000		
16X6-8	10	13	4.33R	152	425	1085	860		
18X7-8 (180/70-8)	14	15	4.33R	173	465	1505	970		
	16					1695	1000		
21X8-9 (200/75-9)	10	15	6.00E	200	535	1545	620		
	14					2040	1000		
23X9-10	14	16	6.50F	225	595	2585	900		
	16					2810	1030		
27X10-12	14	16	8.00G	255	690	3285	860		
	16					3585	1000		

TW898

EXTRA POWER STRONG INDUSTRIAL
超级宽厚花纹工业叉车轮胎

Pattern design with wide contact area increases traction.
Reinforced tie bar between the zig-zag pattern.
New compound for outstanding durability / longer life.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg)	Pressure (kpa)	Type	Code
8.25-15	16	25	6.5	242	845	4050	925	TT	TW898 IND
7.50-16	16	22	6.00S	212	810	3870	880		

H990

XTRA WALL AND MASSIVE TREAD BLOCK
新宽厚花纹工业叉车轮胎

New pattern design supports longer working life.
Special compound could be used in much more hard working sites.
Non-symmetric tread offers more traction power and better wear-ability.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg)	Pressure (kpa)	Type	Code
8.25-15	16	22	6.5	242	840	4050	925	TT	H990 IND
28X9-15	14	22	7.0	220	713	3050	970		
	16					3115	1000		
7.00-12	14	20	5.00S	192	676	2590	1000		
6.50-10	12	21	5.00F	185	590	1895	1000		
7.00-9	10	19	5.00S	192	590	1895	860		
6.00-9	12	18	4.00F	168	540	1675	1030		
5.00-8	10	16	3.50D	138	470	1150	1000		
18X7-8	14	18	4.33R	173	465	1505	970		
	16					1695	1000		


DT1000

SUPER DEEP TREAD & WIDE CROWN SERIES
超深花纹工业叉车轮胎

Developed for heavy use on forklifts and other industrial vehicles.
With its wide and extra deep tread provides stronger traction, longer life
and puncture resistance.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg)	Pressure (kpa)	Type	Code
8.25-20	18	35	6.5	235	975	5300	950	TT	DT1000 IND
8.25-15	16	33.5	6.5	246	851	4050	925		
28X9-15	16	28	7.0	224	713	3115	1000		
7.00-12	14	33.5	5.00S	200	680	2590	1000		
6.50-10	12	31	5.00F	185	599	1865	1000		
6.00-9	12	26	4.00F	168	555	1675	1030		
5.00-8	10	23	3.50D	142	470	1150	1000		
28X9-15	16	28	7.0	224	713	3115	1000	TT	DT1000+ IND
	24					5670	1200		

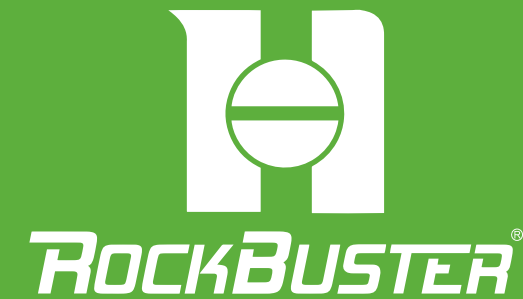

AGRICULTURAL
TYRE

农业轮胎





H657-1/2/3/4/5 R-1 SUPER FARM TYRE
R-1 人字驱动轮以及前轮用农业轮胎

For general farm tractors.
Provides good cutting resistance and longer lifetime.

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @30km/h	Pressure (kpa) @30km/h	Type	Code
6.00-12	6	20	4.50E	165	640	405	250	TT	H657-1 R-1
6.00-12	6	20	4.50E	165	640	405	250		H657-2 R-1
6.00-12	6	23	4.50E	165	640	405	250		H657-3 R-1
6.00-16	6	24	4.50E	165	745	495	250		H657-4 R-1
7.50-16	6	22	5.50F	205	810	650	210		H657-5 R-1
	8					800	280		

H657-6 R-1 SUPER FARM TYRE FOR DRIVE WHEEL
R-1 人字驱动轮农业轮胎

Tractor tire for drive wheel.
Powerful traction and good cutting resistance.

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @30km/h	Pressure (kpa) @30km/h	Type	Code
11.2-24	10	32	W10	285	1105	1380	300	TT	H657-6 R-1
14.9-24	10	38	W13	378	1265	1990	230		
16.9-28	10	39	W15L	430	1435	2380	200		
	12					2580	230		
16.9-30	12	39	W15L	430	1485	2730	240		
16.9-34	10	39	W15L	430	1585	2605	200		
	12					2945	240		
18.4-34	12	36	W16L	467	1655	3375	230	TT/TL	H657-6 R-1
20.8-38	12	42	W18L	528	1835	4000	200		
23.1-26	12	42	DW20	587	1605	3610	170		
	14					3970	200		
23.1-30	12	42	DW20	587	1705	3850	170		
	16					4000	225		

H657-7 R-1 SUPER FARM TYRE FOR DRIVE WHEEL
R-1 人字驱动轮农业轮胎

Tractor tire for drive wheel.
Good traction and high grip ability.

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @30km/h	Pressure (kpa) @30km/h	Type	Code
7.50-20	6	25.5	5.50F	205	910	760	210	TT	H657-7 R-1
	8					900	250		
8.3-24	6	30	W7	210	995	810	240		
	8					950	300		
9.5-20	8	28	W8	240	950	955	300		
	10					1190	370		
9.5-24	8	31	W8	240	1050	1110	280		
	10					1300	370		
11.2-28	8	35	W10	285	1205	1305	240		
	10					1515	300		

H657-8/10

R-1 SUPER FARM TYRE FOR DRIVE WHEEL
R-1 人字驱动轮农业轮胎

Tractor tire for drive wheel and load wheel.
Excellent traction, self-cleaning and cutting resistance.



H657-8 H657-10

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @30km/h	Pressure (kpa) @30km/h	Type	Code
8.3-20	6	28	W7	210	895	695	240	TT	H657-8 R-1
	8					880	300		
9.5-20	8	27	W8	240	950	955	280	TT	H657-10 R-1
	10					1190	370		

H657-11/12

R-1 SUPER FARM TYRE FOR DRIVE WHEEL
R-1 人字驱动轮农业轮胎

Tractor tire for drive wheel.
Powerful traction and good cutting resistance.



H657-11 H657-12

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @30km/h	Pressure (kpa) @30km/h	Type	Code
14.9-26	10	42	W13	378	1315	2055	230	TT	H657-11 R-1
	12					2310	260		
18.4-30	12	35	W16L	467	1550	3180	230	TT	H657-12 R-1
15.5-38	10	34	W14L	395	1570	2320	230		
	12					2700	260		



H657-13 H657-14 H657-15

H657-13/14/15

R-1(LS-1) SUPER TRACTOR & HARVESTER TYRE
R-1(LS-1) 超强拖拉机和收割机轮胎

Tractor/Harvester tire for drive wheel and load wheel.
Excellent traction, self-cleaning and cutting resistance.

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @30km/h	Pressure (kpa) @30km/h	Type	Code
12.4-24	8	36	W11	315	1160	1415	230	TT	H657-13 R-1/LS-1
	10					1650	280		
12.4-28	8	36	W11	315	1260	1510	230		
	10					1760	280		
14.9-24	10	38	W13	378	1265	1990	230	TT	H657-14 R-1/LS-1
14.9-28	10	38	W13	378	1365	2120	230		
18.4-38	12	41	W16L	467	1755	3575	230		
15-24	10	37	DW14	410	1330	2800	280	TT	H657-15 R-1/LS-1



H657-17 H657-18 H657-19 H657-20

H657-17/18 H657-19/20

DR-1 (R-2) SUPER FARM TYRE DEEP TREAD/EXTRA DEEP TREAD
DR-1 (R-2) 加高/超加高加宽人字花拖拉机轮胎(水旱两用)

Specially designed lug profiles for full traction powerand self-cleaning;
Powerful pattern & Wearresistance.Longer life & High durability.

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @30km/h	Pressure (kpa) @30km/h	Type	Code
6.00-12	6	30	4.50E	165	640	405	250	TT	H657-17 DR-1 (R-2)
6.00-16	6	28	4.50E	165	745	495	250	TT	H657-18 DR-1 (R-2)
6.50-16	6	38	5.00F	180	765	565	250	TT	H657-19 DR-1 (R-2)
9.5-24	8	42	W8	240	1050	1110	280	TT	H657-20 DR-1 (R-2)
	10					1300	370		
11.2-24	10	42	W10	285	1105	1380	300		

H657-16

CR-1 FARM TYRE
CR-1 农业拖拉机中耕轮胎

Tractor tire for drive wheel with good cutting resistance for longer tire life.



	Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @30km/h	Pressure (kpa) @30km/h	Type	Code
	11-38	8	35	W10	305	1540	1630	180	TT	H657-16 CR-1
	12.4-48	12	36	W11	315	1760	2975	320		
☆	14.9-24	12	38	W13	378	1265	1990	230		
	14.9-30	12	36	W13	378	1415	2190	230		
	14.9-48	12	38	W13	378	1875	3350	270		
	15.5-38	12	37	W14L	395	1570	2700	260		
	18.4-30	12	41	W16L	467	1550	3180	230		
	18.4-34	12	41	W16L	467	1655	3375	230		
☆	18.4-38	12	41	W16L	467	1755	3575	230		
☆	18.4-42	12	41	W16	467	1857	3350	220		
☆	20.8-38	12	42	W18L	528	1835	4000	200	TT/TL	
☆	24.5-32	16	43	DW21	622	1805	4500	210		
☆	23.1-26	12	42	DW20	587	1605	3610	170		
		14					3970	200		
☆	23.1-30	12	42	DW20	587	1705	3850	170		
		16					4000	225		
☆	30.5L-32	18	45	DW27	775	1820	5800	220		

H657-21

DR-1 (R-2) SUPER FARM TYRE
(DEEP TREAD)
DR-1 (R-2) 加高人字花纹拖拉机轮胎

Specially designed lug profiles for full traction power and self-cleaning.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @30km/h	Pressure (kpa) @30km/h	Type	Code
6.00-16	6	31	4.50E	165	745	495	250	TT	H657-21 DR-1 (R-2)
6.50-16	6	32	5.00F	180	765	565	250		
7.50-16	6	33	5.50F	205	810	650	210		
	8					800	280		
8.3-20	6	38	W7	210	895	695	240		
	8					880	300		
8.3-24	6	38	W7	210	995	810	240		
	8					950	300		
9.5-20	8	42	W8	240	950	955	280		
	10					1190	370		
9.5-24	8	42	W8	240	1050	1110	280		
	10					1300	370		
11.2-24	10	42	W10	285	1105	1380	300		
11.2-28	8	45	W10	285	1205	1305	240		
	10					1515	300		
12.4-28	8	45	W11	315	1260	1510	230		
	10					1760	280		
13.6-24	10	48	W12	345	1210	1790	250		
16.9-34	10	50	W15L	430	1585	2605	200		
	12					2945	240		
12-38	8	37	DW11	320	1575	1570	140		
	10					1800	220		
11-32	8	90	W10	305	1460	1230	200		
	12					1530	290		

H657-22

R-2 HARVESTER TYRE
R-2 蔗田以及稻田型收割机轮胎

Larger traction tire for drive wheel.
Powerful traction, excellent wear resistance and self-cleaning.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @30km/h	Pressure (kpa) @30km/h	Type	Code
9.5-38	10	52	W8	240	1520	1400	280	TT	H657-22 R-2
11-32	12	60	W10	305	1450	1530	290		
11-38	14	60	W10	305	1570	1830	220		
12-38	14	60	DW11	320	1650	2050	300		
12.4-48	14	60	W11	315	1810	3350	400		
14.9-24	10	69	W13	378	1297	1990	230		
14.9-28	10	69	W13	378	1397	2120	230		
16.9-28	12	69	W15L	430	1465	2580	230		
18.4-30	12	81	W16L	467	1598	3180	230		
18.4-34	12	81	W16L	467	1703	3375	230		
18.4-38	12	81	W16L	467	1803	3575	230	TT/TL	H657-22 R-2
20.8-38	12	77	W18L	528	1872	4000	200		
23.1-26	14	89	DW20	587	1662	3970	200		
23.1-30	12	89	DW20	587	1762	3850	170		
	16					4000	225		
19.5L-24	12	76	DW17L	495	1384	2145	210		
28L-26	14	89	DW25	715	1673	4245	170		

H657-23

R-1/IR-1 IRRIGATION TYRE
R-1/IR-1 人字灌溉农业胎

Special design for irrigation application.
Good self cleaning property and sufficient traction.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @30km/h	Pressure (kpa) @30km/h	Type	Code
11.2-24	6	25	W10	285	1103	1045	180	TT	H657-23 R-1/IR-1
12.4-24	8	25	W11	315	1160	1415	230		
13.6-24	8	25	W12	345	1210	1545	210		
14.9-24	8	25	W13	378	1265	1760	180		
11.2-38	10	25	W10	285	1448	2000	170		

H657-24

MZ I-3 FOR IMPLEMENT & HARVESTER WHEEL
MZ I-3 农机具和收割机用胎

Comfortable operation.
Longer tyre lifetime.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @30km/h	Pressure (kpa) @30km/h	Type	Code
12.00-18	10	18	9.00V	325	1085	1800	320	TT	H657-24 I-3
	12					2300	420		

H657-25

PR-1 SUPER PADDY FIELD TYRE
PR-1 高档水田轮胎

Powerful traction, excellent driving stability and Steering Accuracy.
Longer life and High durability, Wear resistance, Outstanding Cold & Heat resistance.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @30km/h	Pressure (kpa) @30km/h	Type	Code
6.00-12	6	45.5	4.5E	165	690	425	270	TT	H657-25 PR-1
6.50-16	8	57	5.00F	165	830	565	250		
7.50-16	10	64	5.50F	195	890	750	300		
8.3-20	10	64	W7	210	950	970	270		
8.3-24	10	64	W7	210	1050	1135	270		
9.5-20	10	78	W8	240	1050	1140	240		
9.5-24	10	78	W8	240	1150	1345	240		
11-32	8	90	W10	305	1460	1230	200		
	12					1530	290		
11.2-24	12	83	W10	285	1205	1465	210		
12.4-26	12	86	W11	315	1265	1728	200		
12.4-28	12	86	W11	315	1315	1785	200		
13.6-24	12	90	W12	345	1210	1790	250		
13.6-38	12	90	W12	345	1710	2675	230		
14.9-24	12	90	W13	378	1260	1990	230		
14.9-26	12	90	W13	378	1315	2055	230		
14.9-28	12	90	W13	378	1365	2120	230		
14.9-30	12	95	W13	378	1415	2190	230		
16.9-30	12	95	W15L	430	1485	2730	240		
16.9-34	12	95	W15L	430	1585	2605	200		
18.4-34	12	95	W16L	467	1655	3375	230		
18.4-38	12	95	W16L	467	1755	3575	230		

H657-26
 PR-1 SUPER PADDY FIELD TYRE
 PR-1 高档水田轮胎

Powerful traction, excellent driving stability and Steering Accuracy.
 Longer life and High durability, Wear resistance, Outstanding Cold & Heat resistance.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @30km/h	Pressure (kpa) @30km/h	Type	Code
6.50-16	8	57	5.00F	165	830	830	250	TT	H657-26 PR-1
7.50-16	10	64	5.50F	195	890	890	300		
8.3-20	10	64	W7	210	950	950	270		
8.3-24	10	64	W7	210	1050	1050	270		
9.5-24	10	78	W8	240	1150	1150	240		
12.4/11-28	12	86	W11	315	1315	1315	200		
11-32	8	90	W10	305	1460	1230	200		
	12					1530	290		
13.6-24	12	90	W12	345	1210	1790	250		
14.9-24	12	90	W13	378	1265	1990	230		
14.9-26	12	90	W13	378	1315	2055	230		
14.9-28	12	90	W13	378	1365	2120	230		
16.9-28	12	90	W15L	430	1478	2580	230		
14.9-30	12	95	W13	378	1415	2190	230		
16.9-34	12	95	W15L	430	1585	2605	200		
18.4-38	12	95	W16L	467	1755	3575	230		
20.8-38	12	95	W18L	528	1887	4000	200		

H657-27

DR-1 (R-2) OVER SIZE AG TYRE FOR DRIVE WHEEL
 FIELD & ROAD USE, DOUBLE DUTY
 DR-1 (R-2) 超大尺寸人字驱动轮农业轮胎
 田路两用轮胎，双倍载重保证

Confident grip & good self-cleaning Extra deep lug depth for long wearing.
 Import design.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @30km/h	Pressure (kpa) @30km/h	Type	Code
☆ 18.4-30 (18.4/15-30)	12	44	W16L	467	1550	3180	230	TT	H657-27 DR-1 (R-2)
☆ 15.5-38	12	42	W14L	395	1570	2700	260		

H657-28
 LS-2 FORESTRY TYRE
 LS-2 林业轮胎

Big block & small block angle design.
 Good traction performance and strong resistance to puncture & wear.
 Special for logging skidder machines.



Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @30km/h	Pressure (kpa) @30km/h	Type	Code
☆ 16.9-30LS	12	48	DW15L	430	1510	2800	240	TT/TL	H657-28 LS-2
	16					3250	310		
☆ 18.4-26LS	12	50.5	DW16L	467	1475	2900	210		
☆ 18.4-30LS	12	50.5	DW16A	467	1575	3075	210		
	16					3650	280		
☆ 18.4-34LS	12	50.5	DW16L	467	1680	3250	210		
	16					3875	280		
☆ 23.1-26LS	16	53	DW20B	587	1630	4500	240		
	20					4875	280		
☆ 24.5-32LS	16	54	DH21	622	1830	5000	210		
	20					5800	280		
☆ 28L-26LS	16	55	DW25B	715	1645	4750	210		
	20					5150	240		
	26					6500	340		
☆ 30.5L-32LS	16	55.5	DW27B	775	1845	5300	170		
	20					6000	210		
	26					7100	280		
	32					8000	340		



H889



H206



H207



H208

H889 H206 H207 H208

AG FRONT WHEEL & TRAILER WHEEL
农机车导向轮和拖车轮用轮胎

Long tyre life with wear resistance.

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @30km/h	Pressure (kpa) @30km/h	Type	Code
4.50-16	6	7	3.00D	130	655	400	390	TT	H889
5.00-14	4	7	3.00D	130	620	365	340		
4.50-14	4	7	3.00D	122	606	345	340		
4.00-14	4	7	3.00D	110	590	270	340		
4.50-12	4	6	3.00D	122	550	307	340		
5.00-14	8	9.5	3.00D	130	620	500	420	TT	H206
4.50-14	8	8	3.00D	122	606	400	420	TT	H207
6.00-16	6	8	4.00E	160	740	560	340	TT	H208
5.50-16	6	8	4.00E	150	710	525	370		
5.00-16	6	7.5	4.00E	142	680	500	370		
4.50-16	6	7	3.00D	130	655	400	390		
4.00-14	4	7	3.00D	110	590	270	340		
4.00-12	4	7	3.00D	110	535	250	340		



H209A



H209B

H209A H209B

F-2 TRIPLE RIB FARM STEERING
F-2 农机车导向轮轮胎

Better Steering with good stability / Self cleaning and damage resistance.
Better tire life / High load capacity.

Size	PR	T.D. (mm)	S.R.	S.W. (mm)	O.D. (mm)	Loading (kg) @30km/h	Pressure (kpa) @30km/h	Type	Cod e
4.00-14	4	7	3.00D	110	590	270	340	TT	H209A F-2
4.00-16	4	8	3.00D	110	640	300	340		
5.00-15	6	9.5	4J	140	665	465	420		
5.50-16	6	13	4.00E	150	710	525	370		
7.50-16	8	15	5.50F	205	810	870	370	TT/TL	
	10					1000	450		
7.50-18	8	21	5.50F	235	860	945	370		
	10					1150	475		
9.00-16	10	18	6LB	235	860	1245	370		
7.5L-15	8	15	6LB	208	745	840	310		
9.5L-15	8	16	8LB	240	780	930	280		
11L-15	8	18	8LB	280	810	1070	420		
	12					1355	340		
10.00-16	10	23	W8L	275	910	1325	310		
11.00-16	10	23	W10L	315	970	1485	450		
7.50-16	10	19	5.50F	210	810	1000	450	TT/TL	H209B F-2(M)
11L-15	8	18	8LB	280	810	1070	420	TL	
	12					1355	230		
14L-16.1	8	18	16.1 X W11C	355	985	1530	340		
	12					1940	340		
10.00-16	10	21	W8L	275	910	1325	310		
11.00-16	10	23	W10L	315	970	1485	450		